

Designer Battery Sensor Faucet & Soap Dispenser Combination

FEATURES:

- Brass construction with polished chrome finish
- Sensor eye near outlet of faucet
- Low Arc modern spout
- Connections included for AC operation on both units

SF-9700 FEATURES:

- Set-up for both battery (6-AA batteries) and AC operation (AC adaptor included)
- 60 second flow time out feature
- 9/16"-24 UNF supply connection (fits 3/8" compression)
- Vandal-resistant 0.5 GPM (1.89 L/min) flow control

SFS-9000 FEATURES:

- Set-up for both battery (4-D batteries) and AC operation (AC adaptor included)
- 2000ml bottle included
- Switch for liquid soap, or foaming soap operation
- 1.0 second soap dispensing

OPTION:

- TMV: Thermostatic Mixing Valve (A-TMV)

ADD-ONS:

- A-SLIM-GBLFE: alternate flow aerator group (1.5 GPM, 1.5 GPM laminar and 1.2 GPM)

STANDARDS:

- ASME A112.18.1/CSA B125.1 certified
- NSF/ANSI 61 certified
- NSF/ANSI 372 certified
- ADA compliant

WARRANTY:

Visit www.speakman.com for full product warranty information

- Limited Lifetime Warranty (residential)
- 5 Year Limited Warranty (commercial)



Information continues on next page


All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:



P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: 01-FEBRUARY 2020

Designer Battery Sensor Faucet & Soap Dispenser Combination

SFC-9790 Below Counter

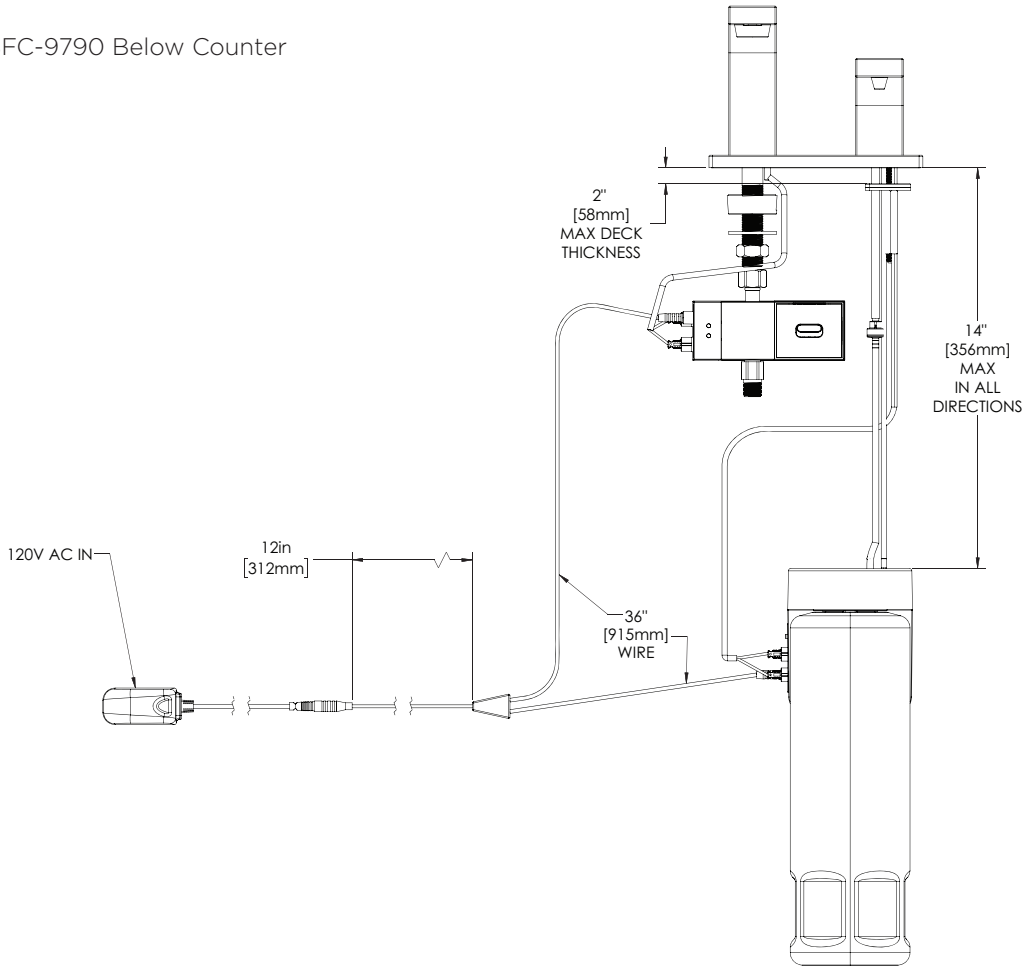

SFC-9790

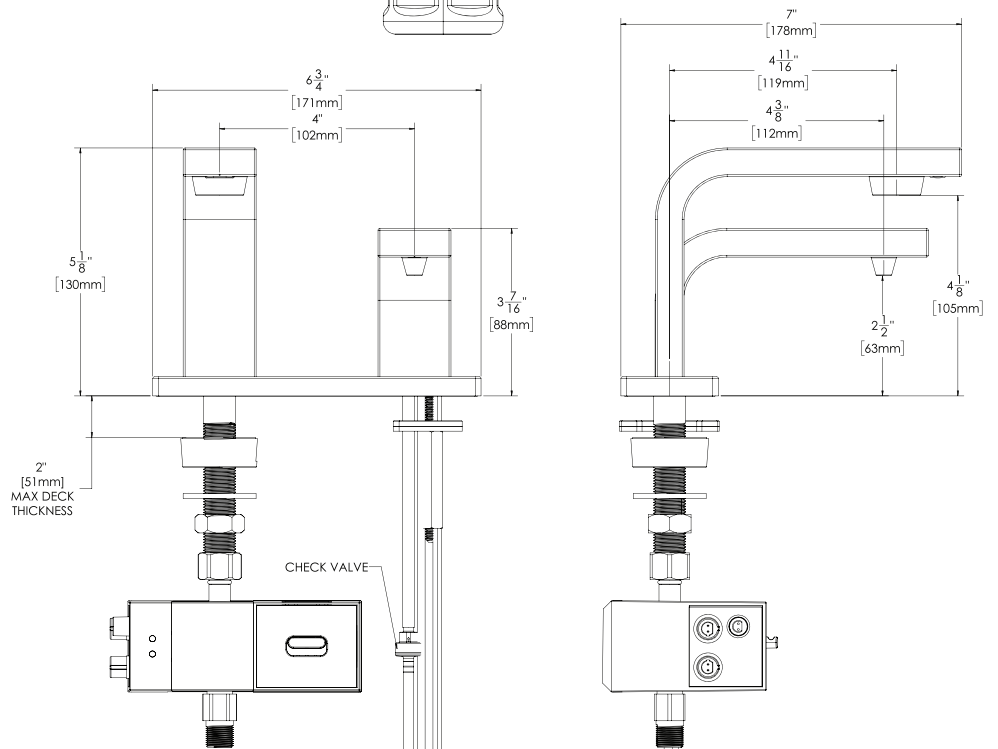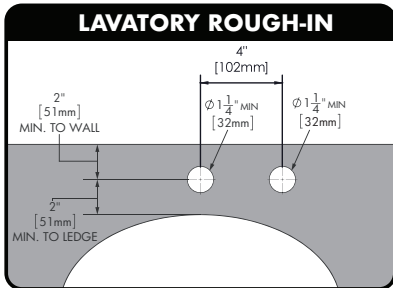

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

P: 800-537-2107
 F: 800-977-2747
 W: WWW.SPEAKMAN.COM
 R: 01-FEBRUARY 2020