

SentinelPro™ Diverter Trim and Shower System (Valve not included)

FEATURES:

- CPT-5401: Diverter Shower Valve Trim
- S-2272-E2: 2.0 GPM (7.6 L/min) Flow Rate Shower Head
- VS-100-PC: Hand Held Shower with Pause/Trickle Button
- VS-115: Supply Ell with Wall Flange
- VS-124: 42 in. Slide Bar
- 69 in. Metal Stainless Steel Hose

VALVE OPTIONS:

- CPV-TP-DV: Thermostatic/Pressure Balancing Diverter Valve
Sweat & Thread Connections
- CPV-TP-DV-PXC: Thermostatic/Pressure Balancing Diverter Valve
PEX F1807 Crimp Inlet Connections
- CPV-TP-DV-PXE: Thermostatic/Pressure Balancing Diverter Valve
PEX F1960 Cold-Expansion Inlet Connections

STOCK FINISHES:




PC

WARRANTY:


Visit www.speakman.com for full product warranty information

- See Speakman.com For Warranty Information

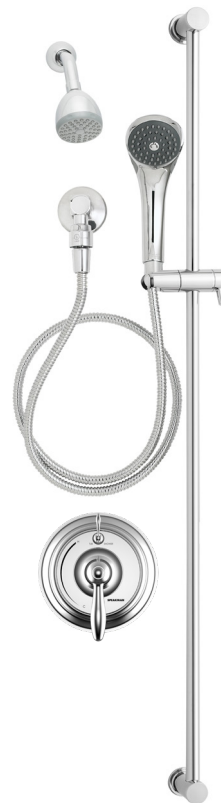

Information continues on next page

SentinelPro™ Diverter Trim and Shower System (Valve not included)

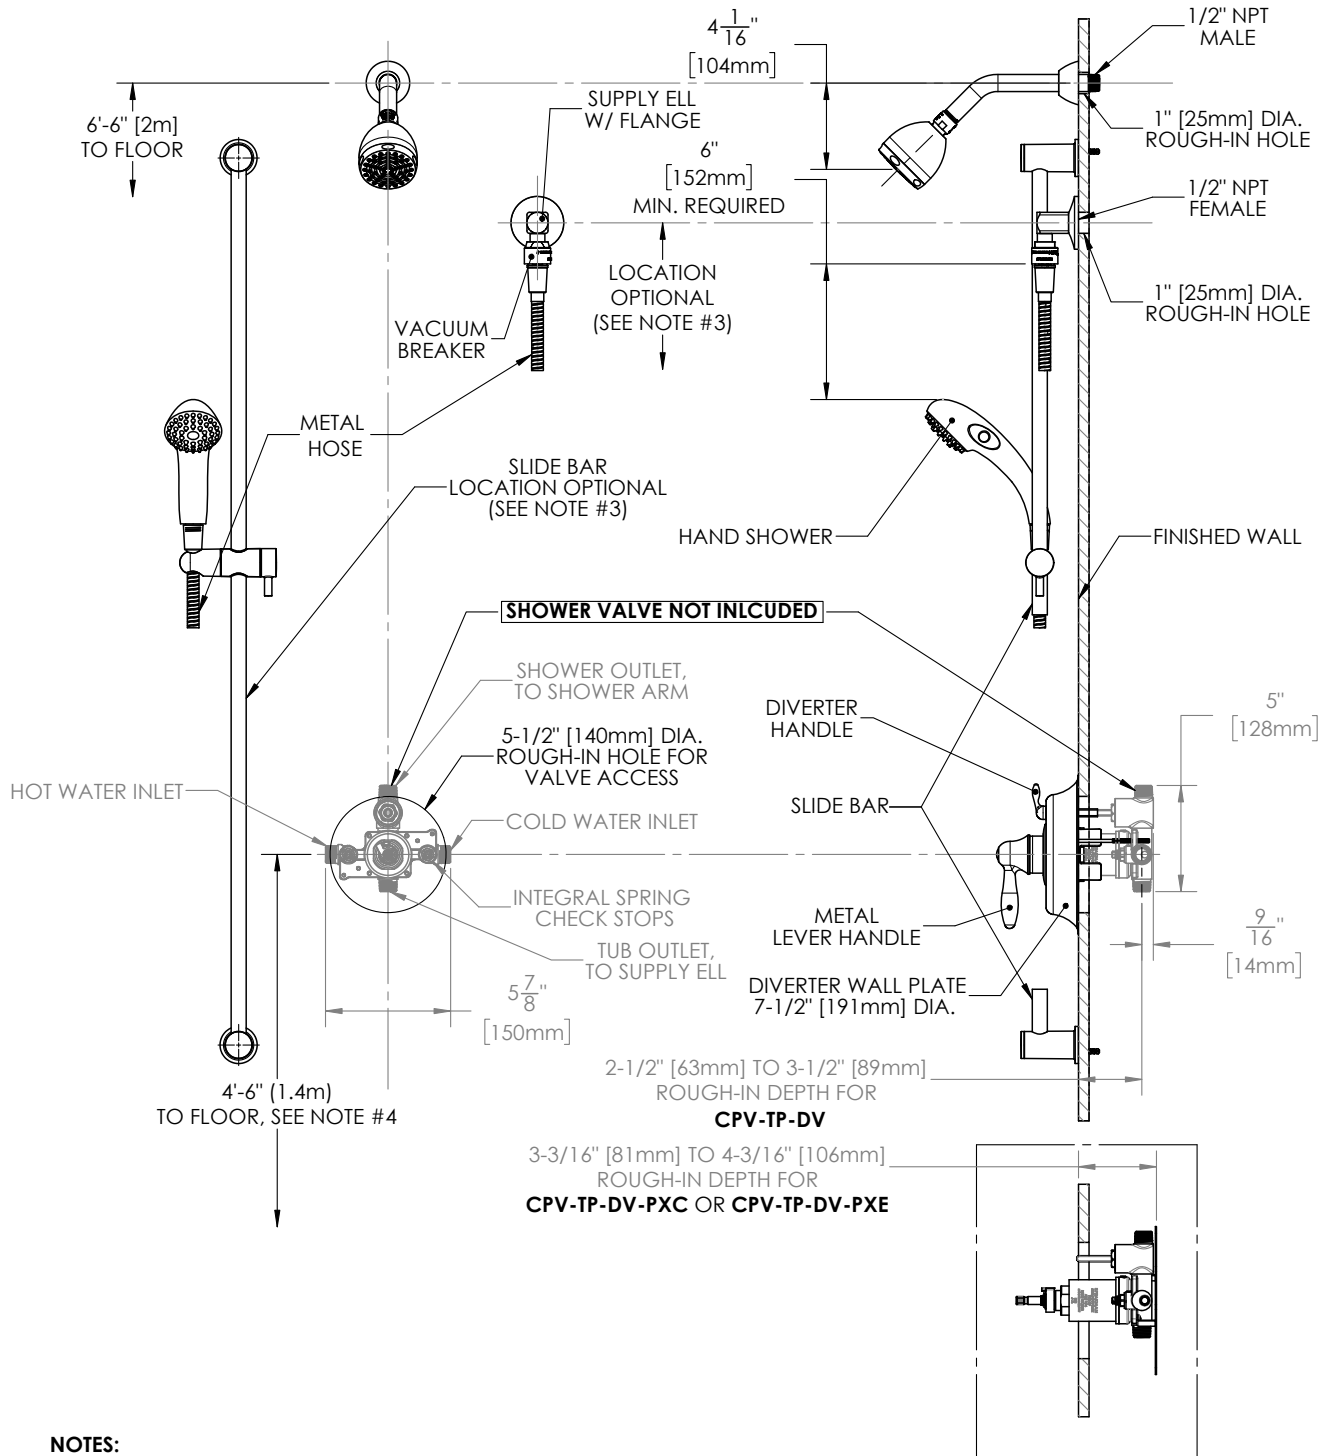

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] UNLESS OTHERWISE SPECIFIED AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.
2. ALL INLETS AND OUTLETS ARE 1/2" FEMALE COPPER SWEAT AND 1/2" MALE NPT UNLESS OTHERWISE SPECIFIED.
3. THE LOCATION OF THE SLIDE BAR AND SUPPLY ELL IS OPTIONAL, BUT RESTRICTED BY THE 69" HOSE LENGTH RUNNING FROM SUPPLY ELL CONNECTION TO THE HAND SHOWER AND THE 6" MINIMUM REQUIREMENT BETWEEN THE IN-LINE VACUUM BREAKER AND TOP OF THE HAND SHOWER (HAND SHOWER ADJUSTED TO HIGHEST POSITION).
4. FOR ADA MOUNTING LOCATIONS CONSULT ADAAG, ANSI A117.1, OR STATE REGULATIONS.