

Neo™ Hand Shower Wand

MODELS:

- VS-3000: 2.5 GPM (9.5 L/min) flow rate
- VS-3000-E2: 2.0 GPM (7.6 L/min) flow rate
- VS-3000-E175: 1.75 GPM (6.6 L/min) flow rate

FEATURES:

- 48 rubber spray outlets, 1 spray pattern
- Metal wand construction
- Shower wand has 1/2" -14 NPSM male inlet with check valve
- Bracket not included
- Includes 5' metal hose with (1) 1/2" -14 NPSM female inlet and (1) 1/2"-14 NPSM female outlet with check valve
- Corrosion resistant finishes
- Coordinates with Neo Collection

STOCK FINISHES:



PC BN MB** BBZ*

SPECIALTY FINISHES:



BBZ BC MB ORB PB PN

OPTIONS/ADD-ONS:

- VS-126: Wall mounted hand held shower bracket



STANDARDS:

- ASME A112.18.1/CSA B125.1 certified

WARRANTY:

Visit www.speakman.com for full product warranty information

- Limited Lifetime Warranty (consumer)
- 1 Year Limited Warranty (commercial)

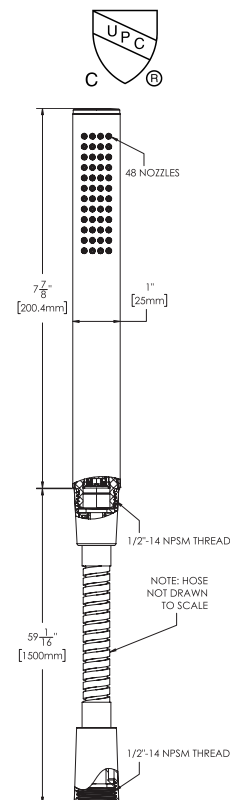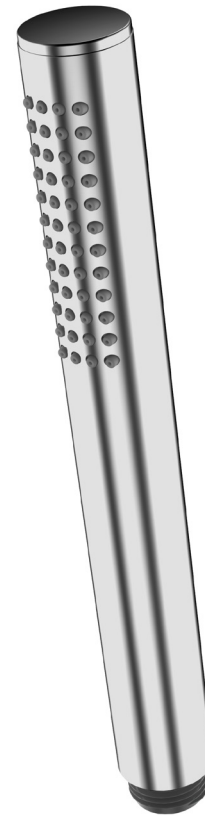

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.
 • Not available for VS-3000. ** Not available for VS-3000-E2, VS-3000-E175

Architect/Engineer Approval Space:

P: 800-537-2107
 F: 800-977-2747
 W: WWW.SPEAKMAN.COM
 R: 05-AUGUST 2021