Easy Push® Single Supply Metering Faucet

FEATURES:

• Brass construction with polished chrome finish

• Vandal resistant easy push handle activation

• Metering cartridge exceeds 10,000 cycles

• 0.25 GPC (0.95 L/cycle)

• Single hole mounting

• 1/2"-14 NPSM inlet connection

• Field adjustable cycle time

• Interchangable indiactors included (blue, red, chrome)

ADD-ONS:

• A-UCM: Under Counter Mixer

• A-4DP: 4" Deck Plate

• A-FC35: 0.35 GPM spray outlet

STANDARDS:

• ADA compliant

• ASME A112.18.1/CSA B125.1 certified

• NSF/ANSI 372 certified

• NSF/ANSI 61 certified

WARRANTY:

Visit www.speakman.com for full product warranty information

• Limited Lifetime Warranty (residential)

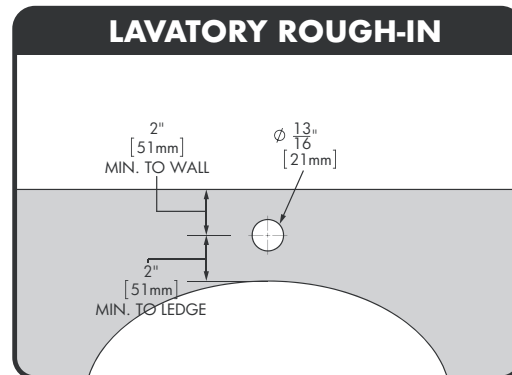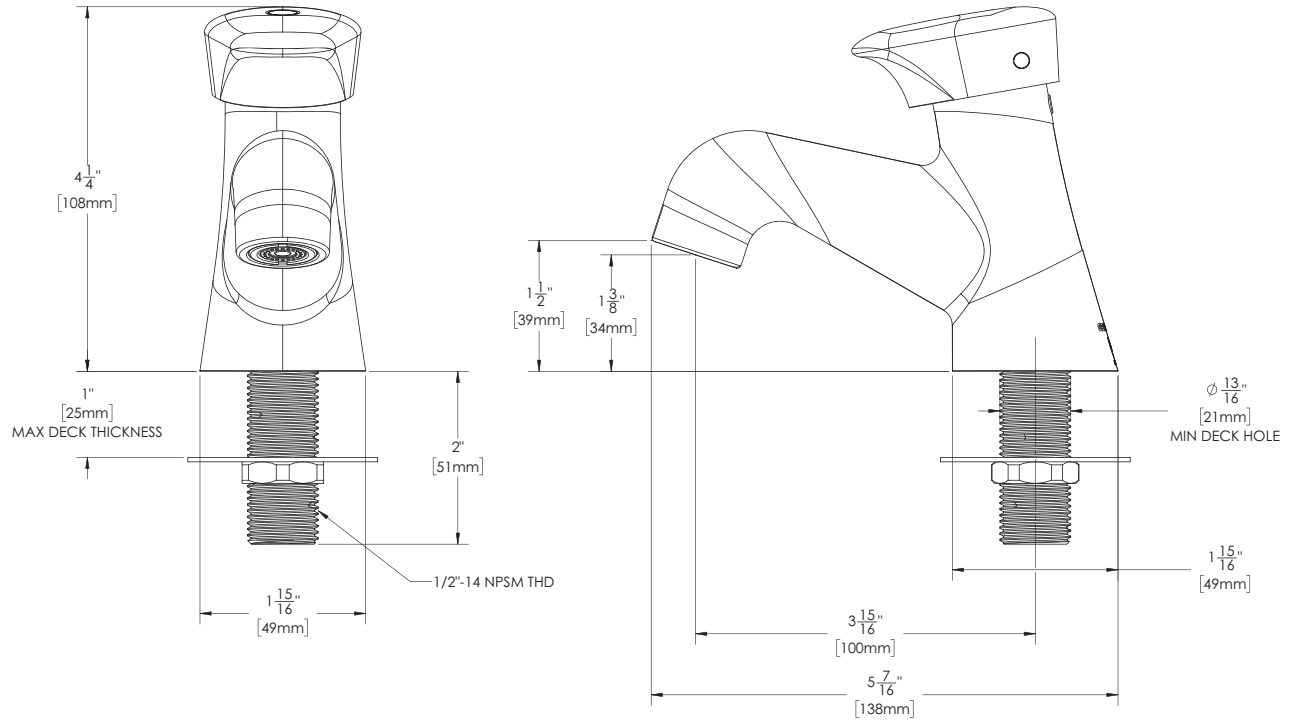• 5 Year Limited Warranty (commercial)

1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

Easy Push® Single Supply Metering Faucet

$4\frac{1}{4}$"
[108mm]

1"
[25mm]
MAX DECK THICKNESS

2"
[51mm]

$1\frac{15}{16}$"
[49mm]

1/2"-14 NPSM THD

$1\frac{1}{2}$"
[39mm]

$1\frac{3}{8}$"
[34mm]

$\emptyset \frac{13}{16}$"
[21mm]
MIN DECK HOLE

$1\frac{15}{16}$"
[49mm]

$3\frac{15}{16}$"
[100mm]

$5\frac{7}{16}$"
[138mm]

LAVATORY ROUGH-IN

2"
[51mm]
MIN. TO WALL

$\emptyset \frac{13}{16}$"
[21mm]

2"
[51mm]
MIN. TO LEDGE

1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space: