

Finesse™ Quick Install™

Frameless sliding shower door 5375EZ-45

Features

- Frameless.
- 1/4" (6 mm) thick tempered glass.
- CleanCoat®+ technology creates a protective barrier that repels water, prevents dirt and minerals from collecting, and makes it easier to remove hard water spots.
- Interior and exterior towel bars complete the look of this door.

Material

Anodized aluminum prevents rust and corrosion.

Technology

- Quick Install system.
- Tempered glass ensures maximum safety and durability.

Installation

- Out-of-plumb adjustability simplifies installation.
- Not for use in hospitality.
- For residential use only.

Included Components

Additional Components:

Hardware kit

hex wrench



Codes/Standards

ANSI Z97.1

CPSC 16CFR 1201

STERLING® Warranty - Bath and **Shower Doors**

See website for detailed warranty information.

Available Glass Options Code Description


Clear Lake Mist™





Finesse™ Quick Install™

Frameless sliding shower door 5375EZ-45

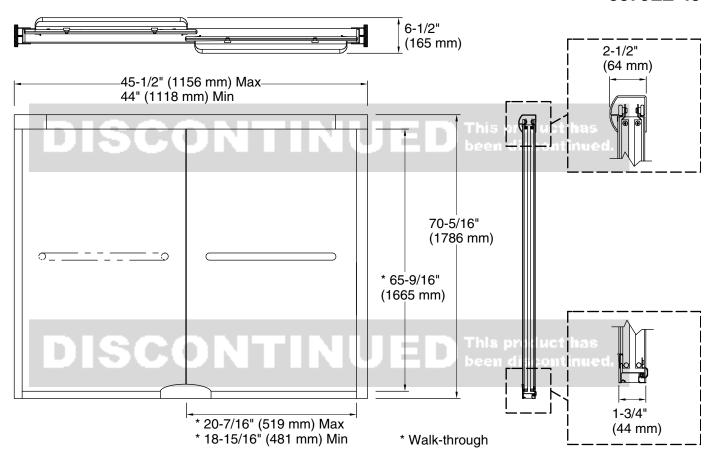

Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - 44" (1118 mm)

Min:

Opening Width - 45-1/2" (1156 mm)

Max:

Walk-through - Min: 18-15/16" (481 mm) Walk-through - Max: 20-7/16" (519 mm)

Glass thickness: 1/4" (6 mm)
Glass coating: CleanCoat®

Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 72-5/16" (1837 mm) to allow for installation clearance.

This product has