

Pramed sliding bath door 5905-59

Features

- Framed, 1/8" (3 mm) thick tempered glass.
- Towel bar.
- Tempered glass ensures maximum safety and durability.

Material

Anodized aluminum prevents rust and corrosion.

Installation

- Out-of-plumb adjustability simplifies installation.
- Not for use in hospitality.
- For residential use only.

Recommended Products/Accessories

K-23723 Faucet cleaner

Included Components

Additional Components:

Hardware kit



Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	N	Nickel
	N	Nickel
	N	Nickel
	Ν	Nickel
	N	Nickel
	S	Silver
	S	Silver


Available Glass Options

Code Description

Birchwood® Templar™



DeluxeFramed sliding bath door 5905-59

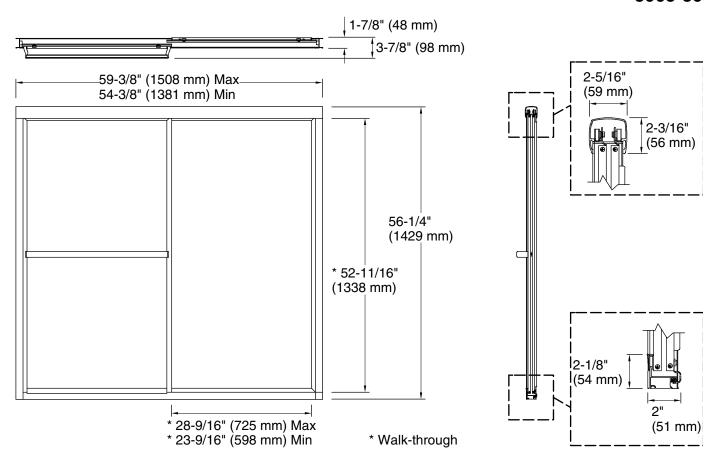

Technical Information

All product dimensions are nominal.

Installation type: For bath installation
Opening Width - 54-3/8" (1381 mm)

Min:

Opening Width - 59-3/8" (1508 mm)

Max:

Walk-through - Min: 23-9/16" (598 mm) Walk-through - Max: 28-9/16" (725 mm)

Base-To-Wall 1.

1/2" (13 mm)

Radius - Max:

Glass thickness: 1/8" (3 mm)

Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 57-11/16" (1465 mm) to allow for installation clearance.