






URBANDALE GRANDE WALL

OL13704

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

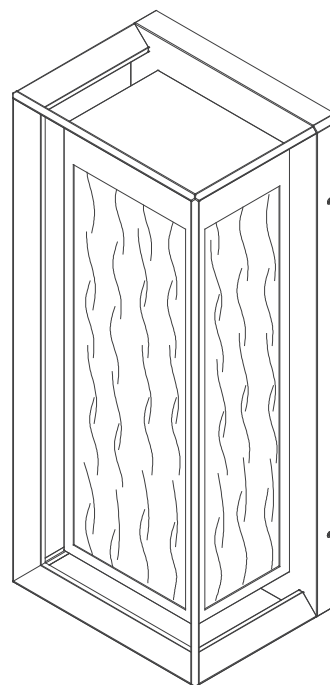

FIXTURE PARTS

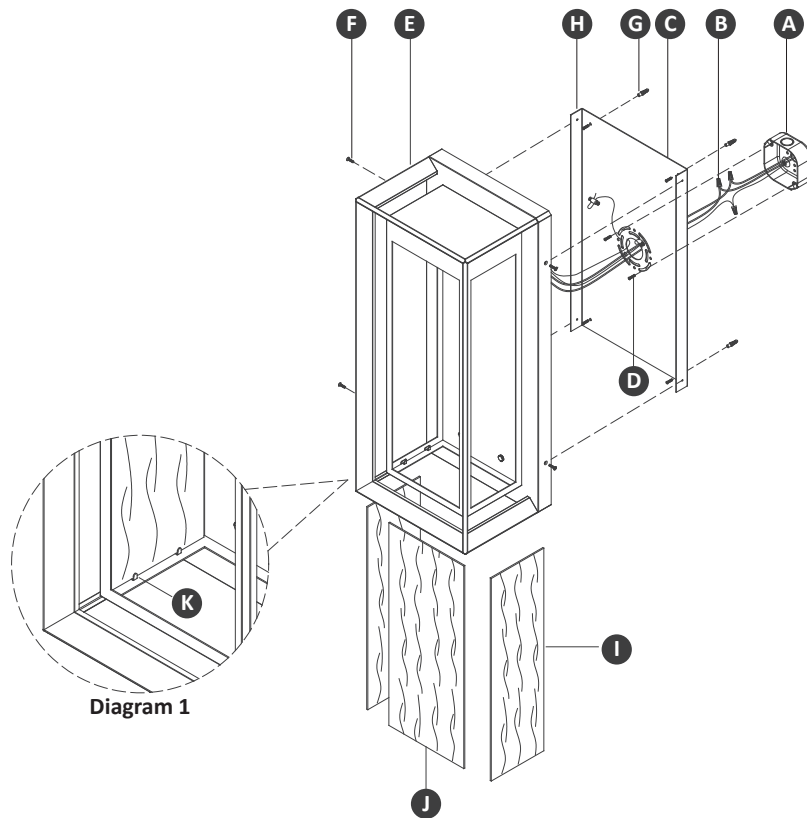

- A. Junction Box (Not Included)
- B. Wire Nut Connections
- C. Mounting Plate
- D. Mounting Screws
- E. Fixture
- F. Set Screws
- G. Anchors
- H. Anchor Screws
- I. Side Glass Sheets
- J. Front Glass Sheet
- K. Metal Tabs
- L. Cable Nut
- M. Cable Nut Screw

INSTRUCTIONS

I. Preparing the Fixture

1. Unbox and inspect all items included in the fixture's packaging. Carefully place all parts on a clean, soft surface.
2. Remove the fixture screws to separate the mounting plate from the fixture.
3. Align the mounting plate with the junction box and mark the anchor positions. Using a drill bit slightly smaller than the anchors, drill holes at the marked locations. Then, tap the anchors into the holes with a hammer until they are flush with the surface.
4. Attach the mounting plate to the junction box using the mounting screws. Then insert the anchor screws into the anchors to securely fasten the mounting plate to the wall.
5. Bend the metal tabs to install the front and side glass sheets to the fixture frame (see diagram 1).

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Feed the support cable through the hole in the mounting plate. Attach the cable lock to one end of the cable, then insert the other end back through the lock. Tighten both cable lock screws with a screwdriver to secure the support cable.
3. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to a suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
4. Connect the fixture input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a. Hot fixture wire (black) and hot power line wire (usually black) from the junction box (hot to hot)
 - b. Neutral fixture wire (white) and neutral power line wire (usually white) from the junction box (neutral to neutral)
5. Carefully tuck all wires behind the mounting plate into the junction box.

III. Installing the Fixture

1. Secure the fixture to the mounting plate with the fixture screws.
2. For wet locations, apply a continuous bead of waterproof construction sealant around the base of the fixture to prevent moisture ingress.