

QUARTER-TURN SILLCOCK

117Q SERIES

PDQ™

SPECIFICATION

Sioux Chief 117 Series PDQ push-fit sillcock shall be used where needed for hose-thread water supply in repair/remodel or new construction applications. Sillcock shall be quarter-turn with easy to grip T-handle. Outlet shall be 3/4" male hose thread and PDQ inlet shall connect to CPVC, PEX, PERT, copper, and any SDR-9 (CTS) tube. Sillcock shall incorporate a release tool and release cartridge with a stainless steel grip ring, a tube alignment bearing, and an EPDM o-ring.

MATERIALS

Valve Body: Brass¹

O-ring: EPDM

Valve Handle: Anodized aluminum

Grip Ring: Stainless steel

Set Screw: Stainless steel

Release Collar: POM

Release Tool: ABS

WORKING LIMITS

Max Working Temp: 200° F

Max Test Pressure: 100 PSIG (air), 150 PSIG (water)

Max Working Pressure: 150 PSIG

DIMENSIONS


A: Connection size	1/2" CTS push-fit
B: Extension	3-5/8"
C: Base width	2-7/8"
D: Base height	2"
E: Overall height	2-15/16"
F: Mounting holes O/C	2-1/8"
G: Outlet connection	3/4" male hose thread

¹ Material is C37700 leaded brass.

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



117Q22

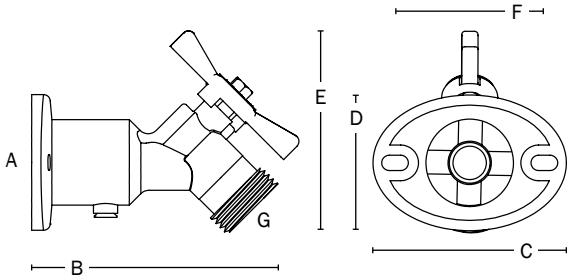

Item Number

117Q22