

LOW-INLET P-TRAP WITH ESCUTCHEON

»» 240 SERIES

SPECIFICATION

Sioux Chief 240 Series brass tubular low-inlet p-trap shall be installed where necessary in plumbing systems. P-trap shall provide a liquid seal that prevents the back passage of gas without affecting the flow of sewage or wastewater through the system when installed in a properly vented DWV system. Trap shall include shallow escutcheon and die-cast nuts. IAPMO Listed. Designed in accordance with ASME A112.18.2.

MATERIALS

Tubular: Chrome-plated brass

Nuts: Chrome-plated zinc


DIMENSIONS

	-01539C04	-01639C04
A: Length	10-1/2"	10-3/4"
B: J-bend height	2-15/16"	3-3/16"
C: Diameter	1-1/4"	1-1/2"
D: Gauge	17-ga	17-ga
E: J-bend width	3"	3-1/4"
F: Wall tube length	7-1/2"	7-1/2"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



240-01539C04

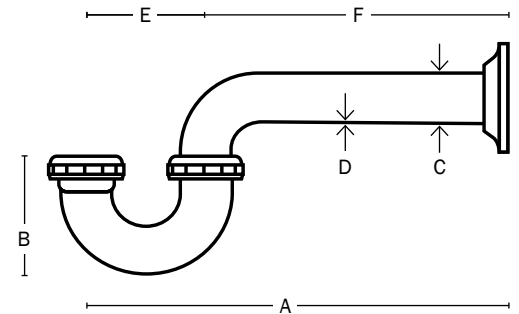

Create Item Number

240-A

e.g. **240-01539C04:** 1-1/4" chrome-plated brass, low-inlet p-trap with shallow escutcheon

TUBULAR DIAMETER **A**

01539C04 = 1-1/4"

01639C04 = 1-1/2"