

DISHWASHER AIR GAP

/// 249 SERIES

SPECIFICATION

Tomahawk dishwasher air gap shall be installed where a dishwasher air gap is required. Air gap device shall be designed with 1/2" inlet hose barb and 3/4" outlet hose barb. Product shall conform to ASSE 1021. Waste discharge from dishwasher shall not be less than 5 gpm with inlet pressure not over 5 psi at inlet connection.

MATERIALS

Body and nut: polypropylene

Cap: chrome-plated brass or chrome-plated polypropylene

INSTALLATION

Product must be installed according to national or local plumbing codes. All hoses must be connected with approved hose clamps (not provided). Connect inlet to dishwasher. Connect discharge outlet to garbage disposal.

CONNECTION

Inlet: 1/2" hose barb

Outlet: 3/4" hose barb


DIMENSIONS

A: cap width	1.712"
B: cap height	2.438"
C: overall height	8.75" – 9.25"
D: inlet	1/2" hose barb
E: outlet	3/4" hose barb

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



249-20135

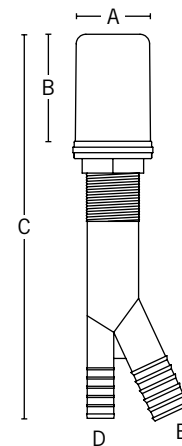

Create Item Number

249-A

e.g. **249:** heavy-duty air gap with chrome-plated brass cap

STYLE A

_ = (leave blank) heavy-duty air gap with chrome-plated brass cap

-20135 = economy air gap with chrome-plated poly cap

