

# SUSPENSION BRACKET

## 521-55 SERIES

## PipeEye™ Suspension Bracket

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

### SPECIFICATION

Sioux Chief 521 series Pipe Eye Suspension bracket shall be used where necessary to secure, insulate or suspend copper, PEX, or CPVC CTS piping in residential or commercial applications. Use on wood or metal studs or joists, or anchor to ceiling or any other flat surface with approved hardware. The Pipe Eye Suspension bracket can also be suspended from 3/8" threaded rod.

After bracket is installed, insert tubing through 1 1/32" hole then position Sioux Chief Pipe Eye plastic grommet around tubing and push grommet through hole until the grommet tabs click and lock into place. The 521-557 features one 1 1/32" hole and can be used to hold 1/2" through 1" CTS tubing using Sioux Chief's Pipe Eye insulating grommets.

The 521-558 features two 1 1/32" holes and can be used to hold up to two 1/2" through 1" CTS pipe runs using Sioux Chief Pipe Eye insulating grommets. The 521-559 features four 1 1/32" holes and can be used to hold up to four 1/2" through 1" CTS pipe runs using Sioux Chief Pipe Eye insulating grommets.

Certified by UPC/IAPMO.

### MATERIALS


21 gauge galvanized steel (0.032" thick)

### SAFE LOAD LIMIT

25 lbs.


### DIMENSIONS

	521-557	521-558	521-559
A: height	2.12"	3"	4"
B: foot length	1.5"	1"	1"
C: width	2"	5"	5"
D: foot to center of hole	1.25"	2"	1.25"
E: center of adjacent hole	—	2.5"	2.5"
F: center of diagonal hole	—	—	3.05"
G: foot to center of hole (offset)	—	—	3"
H: center of vertical hole	—	—	1.75"

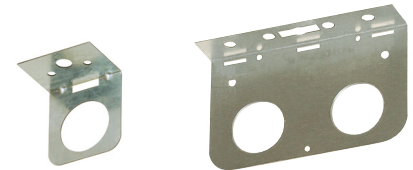


521-557

521-558



521-559

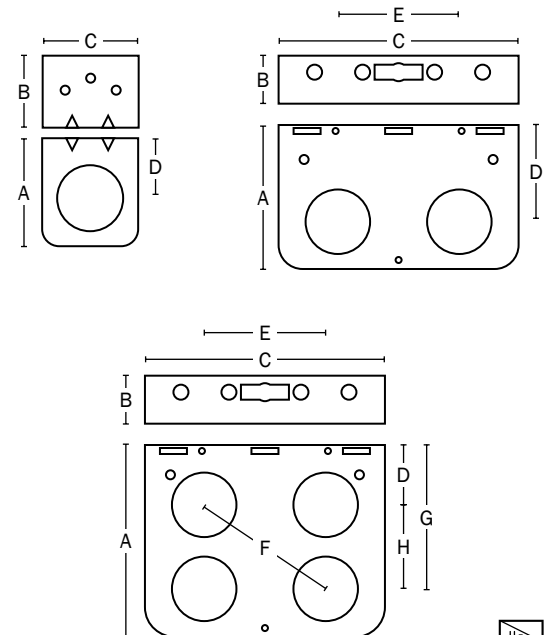

Made in USA

### Create Item Number

#### 521-55A

e.g. 521-558: PipeEye Suspension Bracket with two 1 1/32" holes

#### SUFFIX A

- 7 = one hole
- 8 = two holes
- 9 = four holes