

PLASTIC HANGER STRAP

» 554 SERIES

SPECIFICATION

Sioux Chief plastic hanger strap shall be used where necessary to support DWV pipe and should be installed in accordance with national codes pertaining to hanger spacing and slope requirements. The plastic hanger strap features 1 8" diameter holes spaced 2½" apart. Plastic hanger strap shall conform to the ASTM D-5857.

MATERIAL

Polypropylene

INSTALLATION

Cut plastic hanger strap to desired length. Using approved hardware, secure hanger strap with nail or screw to joist or stud member through pre-drilled pilot hole on strap. Hanger strap may be looped or double wrapped around piping and may be installed on same or opposite sides of floor joists or stud members. To avoid fracturing, plastic hanger strap should not be installed where temperatures fall below 32°F.


WORKING LOADS

Max load: 20 lbs.


DIMENSIONS

A: width ¾"
B: length 10', 25' or 100'

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

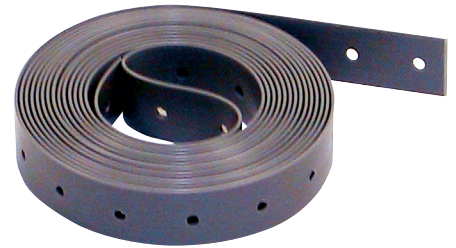

554-25

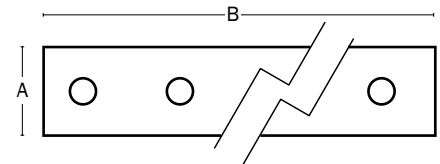

Made in USA

Create Item Number

554-A

e.g. **554-100**: 100' plastic hanger strap.

LENGTH A

10 PK2 = 10' coil

25 = 25' coil

100 = 100' coil