

TRAP PRIMER SPLITTER

» 695-Y/695-D SERIES

PrimePerfect™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 695 series trap primer splitters shall be installed in conjunction with Sioux Chief 695 series mechanical trap primers. Sioux Chief splitters shall allow multiple drains to be primed per trap primer device. Splitters shall connect to primer tailpiece below the vacuum breaker and allow for up to 8 drainage traps to be serviced/primed. Splitters shall connect with a female swivel or captured FIP connection.

MATERIALS

Wye Splitter body: brass, copper, no-lead solder

Wye Splitter branches: brass

Distributor body: brass, copper, no-lead solder

Distributor branches: copper

Distributor branch plug: ABS

INSTALLATION

Install Sioux Chief splitter and distributors using PTFE tape. Assure splitter/distributor and trap primer are in plumb vertical alignment for equal distribution to each trap being serviced. Assure any unused outlets are plugged. Check all connections for leaks. Install splitters in an accessible location.


Assure distribution lines are free of kinks and are in fluid communication with trap after installation.

DIMENSIONS


- A: overall Wye width 2³/₈"
- B: overall Wye height 4³/₄"
- C: distributor height 7³/₈"
- D: captured nut 1/2" FIP



695-D4325

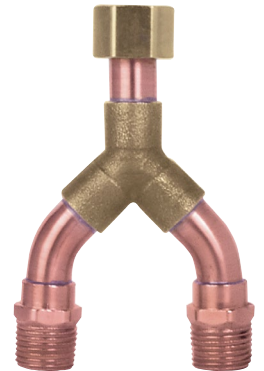

695-Y52

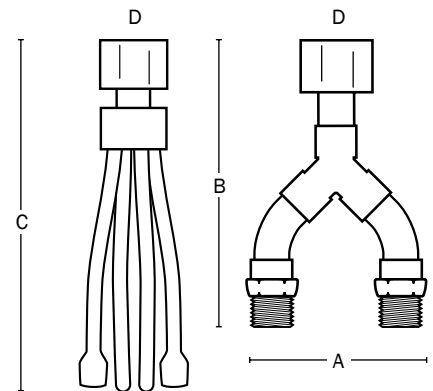

Create Item Number

695-A

e.g. **695-Y52:** Trap Primer Wye Splitter

CONNECTION TYPE A

Y52 = 1/2" FIP swivel x (2) 1/2" MIP outlets

D20 = (2) 1/4" M. Swt branches

D30 = (3) 1/4" M. Swt branches

D40 = (4) 1/4" M. Swt branches

D432 = (2) 1/4" M. Swt branches & (2) spin-closed branches

D432F = (4) 1/2" FIP branches w/ (2) poly plugs

D4325 = (2) 1/2" F. Swt branches & (2) spin-closed branches