

3/4" APPLIANCE OUTLET BOX

» 696 SERIES

OxBox™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 696 series OxBox™ shall be used in residential or commercial plumbing supply systems. Unit shall accommodate supply lines from above or below and shall be designed to secure directly to vertical stud or between studs using galvanized bracket (provided). Supply box shall include lead-free, 1/4-turn ball valve with or without water hammer arrester. Valve options shall accommodate all common industry inlet connections. Outlet connection shall be 3/4" male hose thread. Every unit shall include the finish frame and debris cover for protection during rough-in.

INSTALLATION

Secure box directly to vertical stud using mounting tabs located on side of box or insert bracket through molded channel then secure bracket to structure.

MATERIALS

- Outlet Box:** ABS
- Frame:** fire-rated ABS
- Valve body:** chrome-plated forged brass
- Arrester clip/valve platform:** ABS
- Arrester body:** stainless steel
- Piston:** glass-filled polypropylene with two EPDM o-rings
- Bracket:** galvanized steel, 18-ga.

CERTIFICATIONS/APPROVALS



- IAPMO listed
- Valves meet ASME A112.18.1

VALVE/ARRESTER WORKING LIMITS

- Max working temperature:** 250°F
- Max testing air pressure:** 100 PSIG
- Max working/testing water pressure:** 250 PSIG

DIMENSIONS

- | | | | | | |
|--------------------------------|-----|-------------------------------|------------|-----------------------------|---------------------|
| A: Frame width | 5¾" | E: Rough-in box width | 4" | I: Outlet connection | ¾" male hose thread |
| B: Frame height | 7¼" | F: Rough-in box depth | 3½" | J: Bracket length | 18" |
| C: Frame opening width | 3⅝" | G: Rough-in box height | 5½" | K: Bracket width | ⅝" |
| D: Frame opening height | 5⅝" | H: Supply connection | ½" nominal | | |

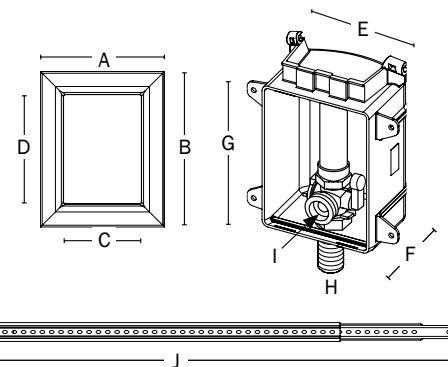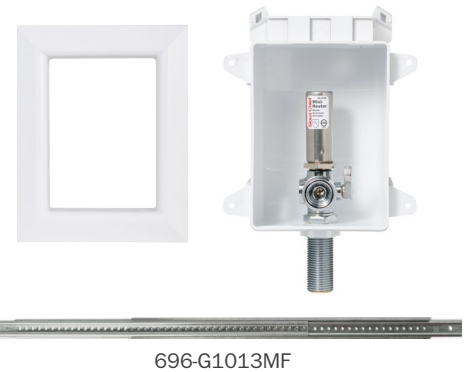

Create Item Number

696-G10A3BF

e.g. 696-G1013MF: appliance supply box with no lead FSWT valve with arrester and frame

ARRESTER OPTION A

- 0 = no arrester
- 1 = with arrester

SUPPLY CONNECTION B

- C = ½" male CPVC
- M = female sweat
- W = ½" PEX F1960 Grip™
- X = ½" PEX F1807 Crimp™