

SHOWER MODULE DRAIN

825 SERIES

SPECIFICATION

Sioux Chief 825 series shower module drain shall be used where necessary in drainage systems. Shower drain shall have a two-piece, receptor base design with ABS or PVC Sch. 40 hub connection. Strainer shall meet all applicable load and flow requirements for intended use. Designed in accordance with ASME A112.18.2-2005 / CSA B125.2-05.

MATERIALS

Strainer: 430 stainless steel
Male-thread Top: PVC
Washers: rubber, polyethylene
Female-thread Body: ABS, PVC

STRAINER LOAD RATING

300 lbs. (19 gauge)

STRAINER FREE AREA

3.25 in²

STRAINER FLOW CAPACITY*

6.0 GPM

DIMENSIONS


A: Connection 1½" Sch. 40 Hub x 2" Spgt. or 2" Sch. 40 Hub
B: Top Diameter 4¼"
C: Height 2½" – 3¼"

* Observed flow rate under test conditions at 0.375" head.

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



825-2P

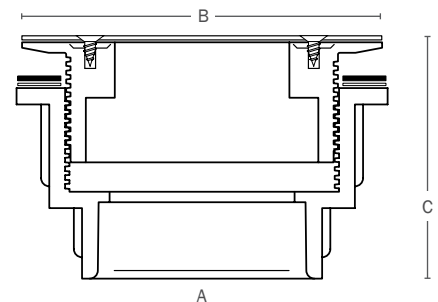

Create Item Number

825-ABC

e.g. **825-2P:** Shower module drain with screw-on strainer, no inserts, 2" PVC Sch. 40 hub connection

CONNECTION SIZE **A**

1 = 1½" Sch. 40 Hub x 2" Spgt. (PVC Only)
2 = 2" Sch. 40 Hub

STRAINER TYPE **B**

_ = Screw-on - No Inserts
0 = Screw-on - Brass Inserts
7 = Snap-in

CONNECTION TYPE **C**

A = ABS
P = PVC