

DUCTILE IRON GRATE

» 832 SERIES

FinishLine™

SPECIFICATION

Sioux Chief 832 Series ductile iron floor drain grate shall be used where necessary in drainage systems. Grate shall install into Coring Sleeve of FinishLine rough-in fixture after removal of Coring Plug. Strainer shall incorporate tapped lugs for optional leveling adjustment and meet all applicable load requirements for intended use.

MATERIALS

Ductile iron

LOAD RATING

15,000 lbs (Special-Duty - heel-resistant)

STRAINER FREE AREA

21.9 in²


DIMENSIONS

- A:** Overall diameter 9"
- B:** Edge thickness 3/4"
- C:** Central thickness 1-1/2"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



832-SD9

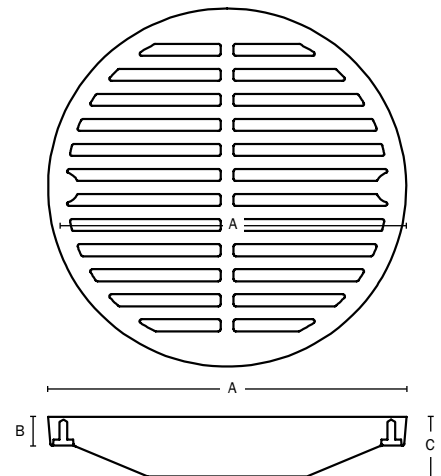

Item Number

832-SD9