

ADJUSTABLE ON-GRADE ROUGH-IN FIXTURE

» 832 SERIES

FinishLine™

SPECIFICATION

Sioux Chief 832 series FinishLine adjustable floor drain rough-in fixture shall be used where necessary in drainage systems. Fixture shall allow adjustment before the concrete pour and incorporate a removable plug for replacement with a FinishLine finish fixture or grate. Trap primer port shall be threaded 1/2" FIP for optional connection. Designed in accordance with ASME A112.6.3

MATERIALS

Coring plug: High-impact polymer

Coring sleeve / Base adapter: Ductile iron

DIMENSIONS


A: Connection	4" No-Hub	6" No-Hub
B: Coring sleeve ID ¹	9"	
C: Base adapter height	4-1/2"	5-3/8"
D: Overall height	5-3/8" – 6-7/8"	6-1/4" – 7-3/4"
E: Trap primer port	1/2" FIP thread - plugged	

1 Fits FinishLine finish fixtures or 832-SD9 grate

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



832-49DF

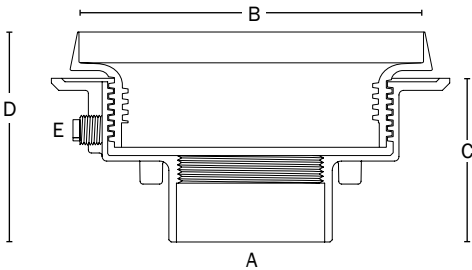

Create Item Number

832-AB

e.g. **832-49DF**: FinishLine adjustable rough-in fixture with 4" No-Hub connection

CONNECTION SIZE **A**

49DF = 4" No-Hub

6DF = 6" No-Hub

OPTIONS **B**

C = Cast iron clamping collar

Available separately:

Loose-set ductile iron Special-duty grate: (832-SD9)

Flexible locating bristle kit: (832-WCQ)

Coring plug wrench: (832-PCQ)