

# ADJUSTABLE ON-GRADE CLEANOUT

» 834 SERIES

FinishLine™

## SPECIFICATION

Sioux Chief 834 series FinishLine™ adjustable on-grade cleanout shall be used where necessary in drainage systems. Cleanout shall allow adjustment before and AFTER the concrete pour. Scoriated cleanout cover shall meet applicable load requirements for intended use. Cleanout shall include a slotted, polypropylene or brass cleanout plug, situated in base adapter. Designed in accordance with ASME A112.36.2M-2002.

## MATERIALS

**Ring/cover:** Nickel-bronze, stainless steel, ductile iron

**Coring plug:** High-impact polymer

**Head adapter/coring sleeve/base adapter:** Ductile iron

**Cleanout plug:** Polypropylene, brass

## COVER LOAD RATING

**Nickel-bronze:** 2,700 lbs. (Medium duty)

**Stainless steel:** 3,500 lbs. (Medium duty)

**Ductile Iron:** 10,000 lbs. (Extra heavy duty)


## DIMENSIONS

<b>A:</b> Connection	4", 6" No-Hub
<b>B:</b> Ring/strainer diameter	9"
<b>C:</b> Base adapter height	
4" connection	4½"
6" connection	5⅜"
<b>D:</b> Pre-pour height	
4" connection	5⅜" – 6⅞"
6" connection	6¼" – 7¾"
<b>E:</b> After-pour height	0" – 1½"
<b>F:</b> Cleanout plug	
4" connection	4" male thread
6" connection	6" male thread

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



834-6DiR

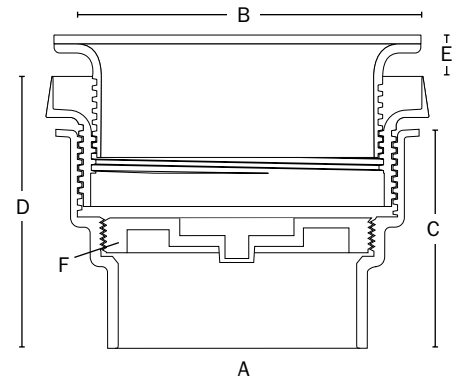

## Create Item Number

### 834-ABC

e.g. **834-6DNRV:** FinishLine™ cleanout with 6" No-Hub connection and vandal-resistant, nickel-bronze cover

#### CONNECTION A

**49D** = 4" No-Hub

**6D** = 6" No-Hub

#### RING/COVER B

**NR** = Round nickel-bronze

**SR** = Round stainless steel

**iR** = Round ductile iron

#### INSTALLED OPTIONS C

**V** = Vandal-resistant cover screws

**S** = Stamping: specify letters<sup>1</sup>

**C** = Carpet marker

**B** = Brass plug in place of polypro

#### ACCESSORIES (ordered separately)

**832-W** = Flexible locating bristle kit

<sup>1</sup> Available for round strainers only