

ADJUSTABLE CLEANOUT

852 series

SPECIFICATION

Sioux Chief 852 Series adjustable cleanout shall be used where necessary in drainage systems. Cleanout shall have an MIP thread connection, for attachment to FIP fitting. Cleanout cover shall meet applicable load requirements for intended use. Cleanout shall include a slotted, polypropylene cleanout plug.

MATERIALS

ring/cover: nickel-bronze or cast iron

thread body: cast iron

cleanout plug: slotted polypropylene

COVER LOAD RATING

nickel-bronze: 4,000 lbs. (medium duty)

cast iron: 5,000 lbs. (heavy duty)


DIMENSIONS

	<i>round pattern</i>	<i>square pattern</i>	<i>cast iron</i>
A: ring/cover diameter	6½"	7"	6⅝"
B: height	2 ¹⁵ / ₁₆ "	2 ¹⁵ / ₁₆ "	3 ⁹ / ₁₆ "
C: plug	3½" MIP	3½" MIP	3½" MIP

Item # Submitted _____
Job Name _____
Location _____
Engineer _____
Contractor _____
PO# _____ TAG _____



852-()LNR

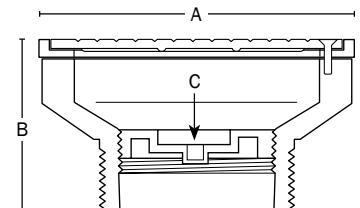

Create Item Number

852- 4i A B

e.g. 852-4iLNQV = 4" cast iron cleanout with square nickel-bronze ring and cover and vandal-proof screws

A RING & COVER

- LNR round nickel-bronze
- LNQ square nickel-bronze
- Li round cast iron

B OPTIONS (FACTORY INSTALLED)

- V vandal-resistant cover screws
 - S stamped cover, specify letters ¹
- ¹ NOT available with cast iron ring & cover