

# FLOOR DRAIN

## 860 SERIES

FatMax™

### SPECIFICATION

Sioux Chief 860 series large capacity stainless steel floor drain shall be used where necessary in drainage systems. Drain shall have a seamless stainless steel body and 4" no-hub connection. Strainer shall be slotted and meet all applicable load requirements for intended use. Drain shall be designed with a removable stainless steel debris bucket, and all internal surfaces shall have a bead blasted finish.

### MATERIAL

304 Stainless steel

### STRAINER FREE AREA

3" drain = 11.25 in<sup>2</sup>

4" drain = 20.0 in<sup>2</sup>

### STRAINER LOAD RATING

5,000 lbs. (heavy-duty)



### DIMENSIONS

A:	connection	3" no-hub	4" no-hub
B:	overall height	5½"	5⅝"
C:	sump height	2¾"	2¾"
D:	top to flange	2"	2"
E:	flange diameter	8"	10⅜"
F:	strainer rim O.D.	6¾"	8⅞"
G:	strainer diameter	6½"	8⅝"
	sump volume	68.2 in <sup>3</sup>	121.5 in <sup>3</sup>

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



860-4SS

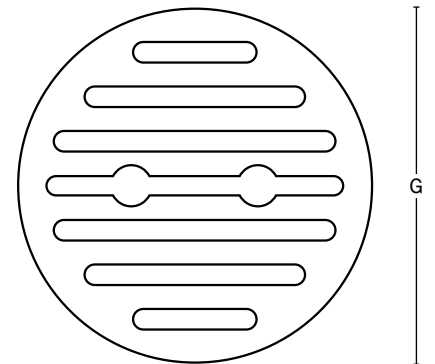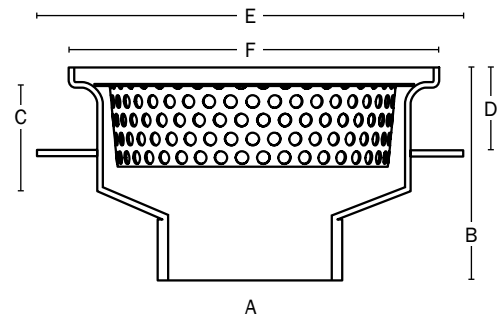

Choose Item Number

## CONNECTION

**860-3SS** = 3" no-hub connection

**860-4SS** = 4" no-hub connection