

# ADJUSTABLE FLOOR DRAIN - ROUND TOP

## »» 862 SERIES

### SPECIFICATION

Sioux Chief 862 Series coated cast iron adjustable floor drain with anchor flange, weep holes, clamping collar, adjustable round nickel-bronze top with vandal-resistant/heel-resistant, secured grate, 1/2" NPT trap primer (plugged) and bottom outlet. Designed in accordance with ASME A112.6.3

General purpose floor drain for use in kitchens, showers, restrooms and other finished areas with foot traffic.

### MATERIALS

**Drain body:** cast iron  
**Clamping collar:** cast iron  
**Head/strainer:** nickel-bronze


### LOAD RATING

2,500 lbs.

### DIMENSIONS

<b>A:</b> Connection size	2"	3"	4"		
<b>B:</b> Top diameter	5-1/4"	6"	7"	8"	9-1/2"
<b>C:</b> Strainer adjustment	1.0" - 2.2"	1.0" - 2.5"	1.3" - 2.6"	1.4" - 2.7"	1.6" - 2.8"
Strainer free-area	8.0 in <sup>2</sup>	10.5 in <sup>2</sup>	15.4 in <sup>2</sup>	20.8 in <sup>2</sup>	32.0 in <sup>2</sup>

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

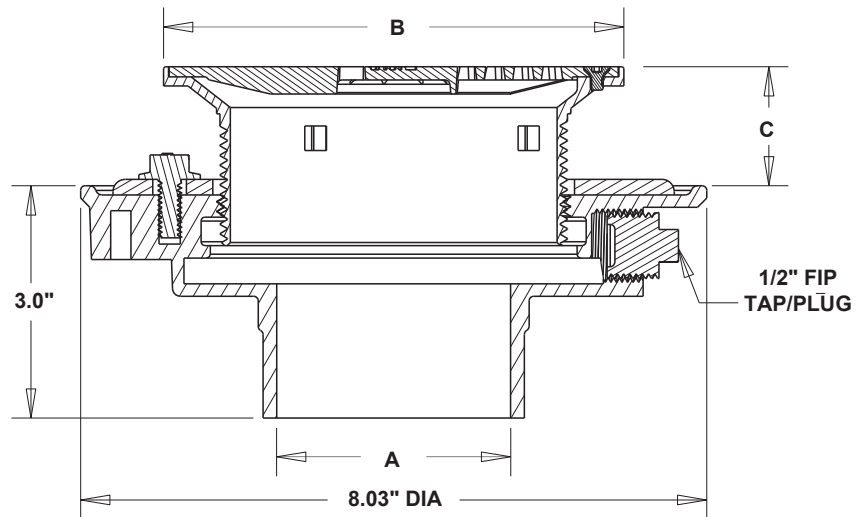

### Create Item Number

## 862-ABCD

e.g. **862-236NRB**: Floor drain - 3" No-Hub connection, 6" round NB head/strainer with debris bucket

#### CONNECTION TYPE A

- 2 = No-Hub outlet
- 6 = Push-Joint outlet

#### CONNECTION SIZE B

- 2 = 2"
- 3 = 3"
- 4 = 4"

#### STRAINER DIAMETER C

- 5NR = 5-1/4" round
- 6NR = 6" round
- 7NR = 7" round
- 8NR = 8" round
- 10NR = 9-1/2" round

#### OPTIONS D

- A = Epoxy-coated body/collar
- B = Debris bucket