

TRENCH DRAIN GRATE

» 865 SERIES

FastTrack™

SPECIFICATION

Sioux Chief 865 Series ductile iron cross-slot grating shall be used where necessary with FastTrack trench drain channels. Grating shall be approved for use in heavy-duty applications and parking areas with truck/vehicle traffic at less than 15 mph. Grating shall have decorative/ADA pattern and fasten to anchors with screws.

ADA Compliant: Yes

Heel-Resistant: Yes¹

Load Rating:

DIN EN 1433: Class C250²

ASME A1122.6.3: Heavy Duty

MATERIALS

Grate: Ductile iron

Screws: nickel-plated brass

FREE AREA

64.0 in²

DIMENSIONS

A: Length 2", 3", 4"

B: Width

C: Thickness 8-1/2"


D: Slot length 4"

E: Slot opening 5" – 7"

¹ Per ASME A112.6.3 requirements

² Grate can be installed with or without ductile iron grate frame (865-F)

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

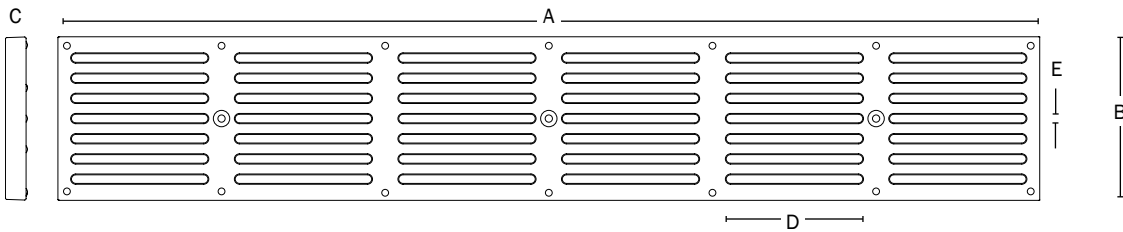

Item Number

865-GiC