

# TRENCH DRAIN GRATE BRICK SLOT ACCESS SECTION

» 865 SERIES

FastTrack™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

## SPECIFICATION

Sioux Chief 865 Series stainless steel brick slot access section shall be used where necessary to provide access to the FastTrack trench drain channels when brick slot grates are used. Access section shall be corrosion resistant and approved for use in high-traffic areas for pedestrian, bicycle and light vehicle traffic at less than 15 mph.

**ADA:** Yes

**Heel-Resistant:** No

**Load Rating:\***

DIN EN 1433: Class C250

ASME A112.6.3: Heavy-Duty

## MATERIALS

304 Stainless steel - 12 gauge

## FREE-AREA


5.11 in<sup>2</sup>

## DIMENSIONS

A: Length	12"
B: Width	6.7"
C: Overall height	3.5"
D: Slot opening	0.4375"
Surface fill area	11.375" x 5.625" x 2.75"



\* Load rating assumes proper concrete encasement of channel and concrete or paver surface with compacted base

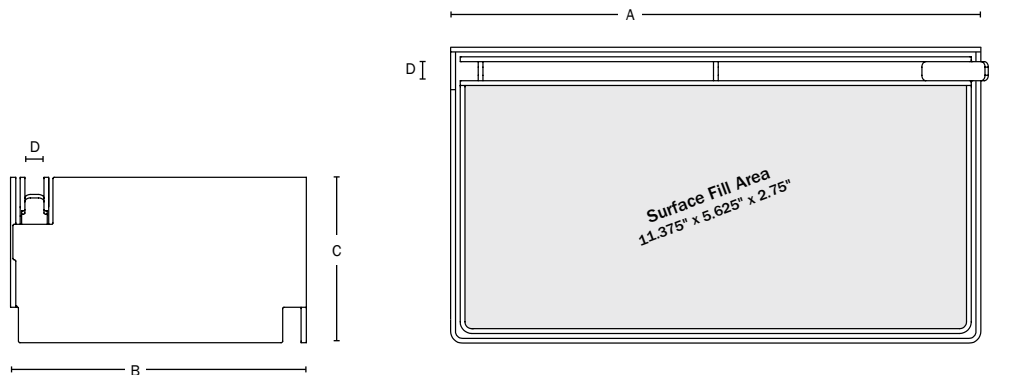

Item Number

**865-GSBC**