

TRENCH DRAIN GRATE

865 SERIES

FastTrack™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 865 Series reinforced stainless steel slotted grating shall be used where necessary with FastTrack™ trench drain channels. Grating shall be corrosion resistant and approved for use in heavy-duty applications and parking areas with truck/vehicle traffic at less than 15 mph. Grating shall have large, open slots for increased flow capacity into channel and fasten to anchors with screws.

ADA: No

Heel-Proof: No*

Load Rating:

DIN EN 1433: Class C250

ASME A112.6.3: Heavy Duty

MATERIALS

Grate: 304 Stainless steel - 14 gauge

Framework: ductile iron (zinc-coated)

Screws: Stainless steel


FREE-AREA

60.0 in²

DIMENSIONS

A: Length	36"
B: Width	6"
C: Thickness	3/4"
D: Slot Length	5"
E: Slot Opening	7/16"

* Per ASME A112.6.3 requirements

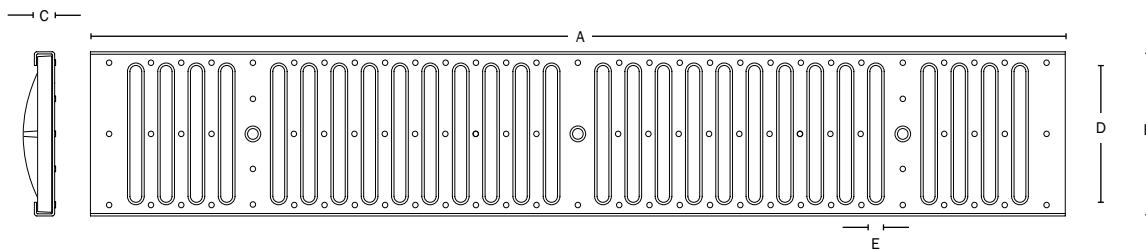

Item Number

865-GSSR