

TRENCH DRAIN GRATE

» 865 SERIES

FastTrack™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 865 Series stainless steel perforated grating shall be used where necessary with FastTrack trench drain channels. Grating shall be corrosion resistant and approved for use in high-traffic, light-duty areas for pedestrian, bicycle and two-wheeled hand cart applications. Fasten grate to anchors with screws.

ADA: Yes

Heel-Proof: Yes*

Load Rating:

DIN EN 1433: Class A15

ASME A112.6.3: Light Duty

MATERIALS

Grate: 304 Stainless steel - 16 gauge

Screws: Stainless steel


FREE-AREA

37.0 in²

DIMENSIONS

A: Length	36"
B: Width	6"
C: Thickness	3/4"
D: Pattern length	4 3/4"
E: Pattern width	1 1/2"
F: hole diameter	1/4"

* Per ASME A112.6.3 requirements

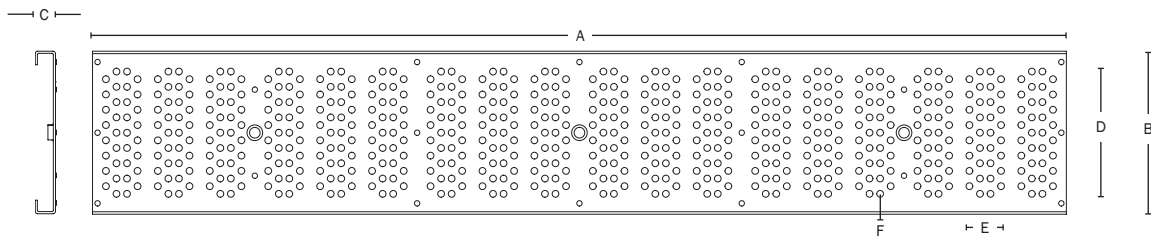

Item Number

865-GSD