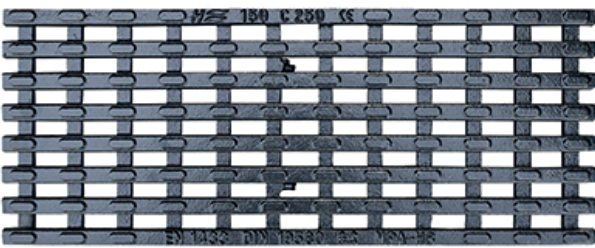
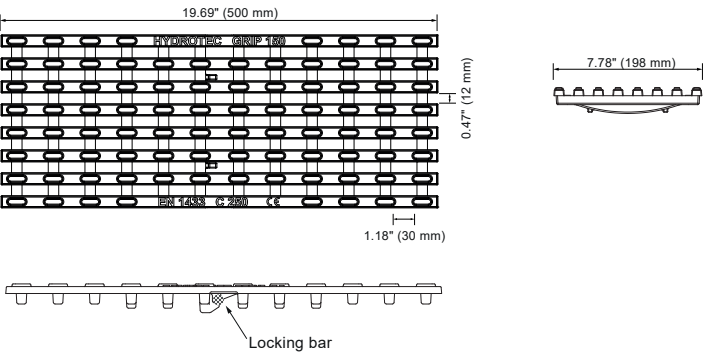


## Top 150 System Ductile Grate / C250 / ADA "Grip"



<p><b>Product Specifications</b></p> <p><b>Part. No.:</b> 865-T6DI5CL</p> <p><b>Load Class:</b> C250 (55,100 lbs) according EN 1433 Certified by MPA-HB (independent laboratories)</p> <p><b>Material:</b> Ductile Iron GJS-500-7 (ASTM A536 70-50-05)</p> <p><b>Locking:</b> Patented boltless grate locking system</p> <p><b>Surface:</b> GRIP slot design (0.47" x 1.18") Slots according ADA Standards</p> <p><b>Weight:</b> 13.2 lbs (6.0 kg)</p> <p><b>Water intake:</b> 94.55 in<sup>2</sup> (610cm<sup>2</sup>) per meter</p> <p><b>Use:</b> This grate is designed for use with HydroTec Top 150 channels made of fiber reinforced concrete with a galvanized steel edge protection.</p>	 
---	---

### Fiber Reinforced Concrete Channel

**Available heights(h):**

- 8.27" (210mm)
- 10.24" (260mm)
- 12.20" (310mm)

- pre-sloped  
(10 sections)

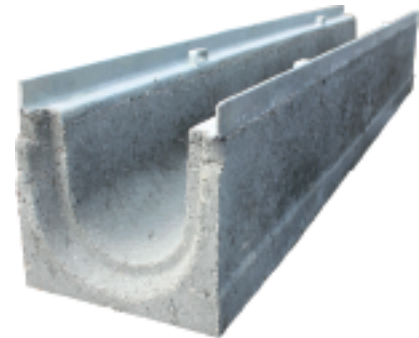

### System Specifications

**Grate Locking Tool (Part No. 865-TOOL):**

The Grate Locking Tool is made of galvanized steel. It's used to lock and unlock the grate.

**Grate:**

The grate is made of ductile iron and certified to EN 1433 Load Class C250.

**Locking Bar (Part No. 865-6LR):**

Two locking bars fix the grate to the channel body. They're unlocked by the Grate Locking Tool .

**TOP 150 Channel:**

The channel body is made of fiber reinforced concrete with a galvanized steel edge protection. Connecting profiles at the end of the channel guarantee an easy and fast installation.

