

# ROOF DRAIN

867 series

## SPECIFICATION

Sioux Chief 867 series adjustable planter area drain shall be used where necessary in drainage systems. Drain shall allow adjustment within the planter box using contractor-supplied 4" Sch. 40 pipe. Lower drain body shall include an FIP thread clamping collar and thread x hub adapter. Upper drain body shall include a clamping collar/gravel guard and dome strainer. Drain shall have a Sch. 40 hub connection, which conforms to ASTM D2665 (PVC) or D2661 (ABS). Connection to drainage system shall be made with a solvent weld joint to ABS/PVC pipe.

## MATERIALS


- lower drain body: ABS, PVC
- clamping collar: ABS
- thread x hub adapter: PVC
- upper drain body: PVC
- gravel guard: ABS
- dome strainer: U.V. resistant polypropylene
- debris cover: stainless steel mesh

## DIMENSIONS

- A: lower body connection 3" or 4" Sch. 40 hub
- B: flange diameter 10"
- C: lower body height<sup>1</sup> 3¾"
- D: dome/screen height 4¼"
- E: dome/screen diameter 8½"
- F: upper body height 4"
- G: standpipe<sup>2</sup> 4" Sch. 40 PVC

- 1 4" connection adds ¼" to this dimension
- 2 PVC standpipe is not supplied and may be drilled and wrapped if desired

Item # Submitted _____
Job Name _____
Location _____
Engineer _____
Contractor _____
PO# _____ TAG _____

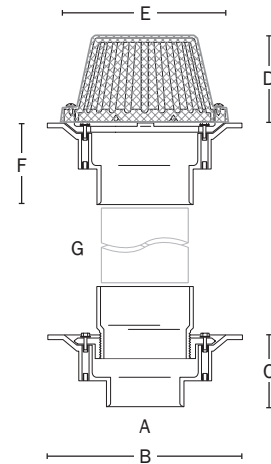

Create Item Number

**867- A B**

e.g. 867-L4PP = Planter area drain with 4" Sch. 40 PVC hub connection

### A CONNECTION SIZE

- L3 3" Sch. 40 hub
- L4 4" Sch. 40 hub

### B CONNECTION TYPE

- AP ABS
- PP PVC

### ACCESSORIES

- 867-C underdeck clamp