

SEWER RELIEF DEVICE

869 SERIES

SPECIFICATION


Sioux Chief 869 series sewer relief device shall be used where necessary in drainage systems. Device shall be installed outside the home and lower than fixtures inside. Device shall open in the event of a backup to release water/sewage and remain closed when not in use to prevent escape of sewer gas.

MATERIALS

Thread body/stem/cover: gray ABS
Spring: 304 stainless steel

INSTALLATION

Installation diagram below should be used as a guide only. Always be aware of, and follow local plumbing codes. Be sure to wear proper safety equipment during installation.

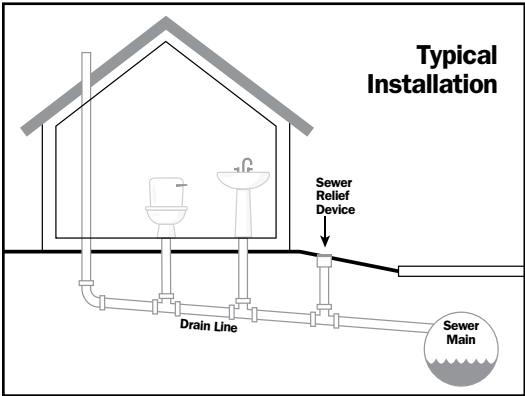


A vertical pipe, connected to the drain line, should be located between the outside of the dwelling and the sewer main. Install a female adapter at ground level and lower than the fixtures inside the dwelling. Thread the sewer relief device into the female adapter, using thread sealant as desired¹. Device should be checked regularly to ensure proper operation and replaced if needed.

DIMENSIONS

A: Connection size 3", 4" MIP thread
B: Overall height 3-3/8"

¹ Thread sealant is not required, but must be compatible with plastics if used.

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

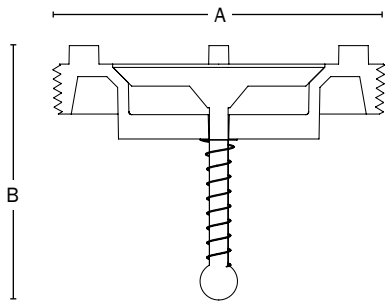

Create Item Number

869-A

e.g. 869-SRV4: Sewer relief device with 4" male threads

SIZE A

SRV3 = 3" Male thread

SRV4 = 4" Male thread