

# HEAVY-DUTY DWV TEST CAP

» 880 SERIES

HardHat™

## SPECIFICATION

Sioux Chief 880 Series HardHat™ test cap for ABS or PVC DWV pipe shall be used where necessary. Test caps are designed for temporary use during DWV pressure test or to reduce job site debris in drain lines.

## MATERIALS

ABS or PVC

## INSTALLATION



Be sure pipe is cut squarely. Install with appropriate primer/cleaner and solvent cement per manufacturer's instructions. Allow specified amount of time for cement to cure before pressure test.

## DIMENSIONS

<b>A:</b> Size	1-1/2"	2"	3"	4"
<b>B:</b> Overall height	11/16"	11/16"	11/16"	11/16"
<b>C:</b> Socket depth	9/16"	9/16"	9/16"	9/16"
Max Test Pressure <sup>1</sup>	40 PSI	40 PSI	25 PSI	25 PSI

1 Not a recommendation – DWV pipe is not designed or intended for high-pressures

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

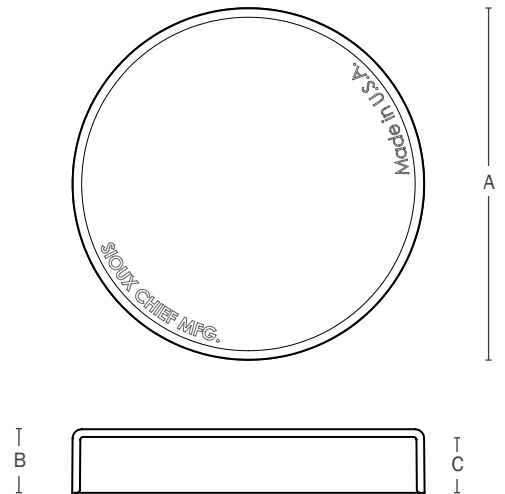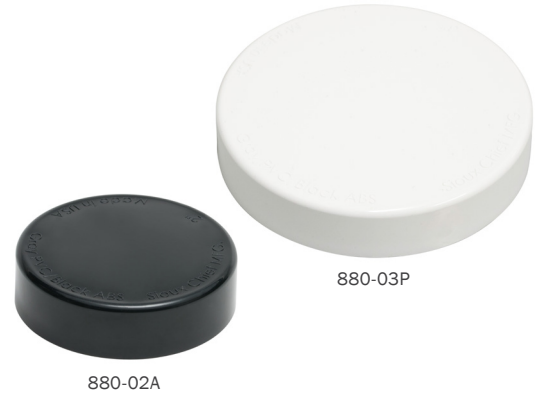

Create Item Number

## 880-AB

e.g. **880-03P**: Heavy-duty PVC test cap for 3" PVC DWV pipe

### SIZE A

- 01 = 1-1/2"
- 02 = 2"
- 03 = 3"
- 04 = 4"

### MATERIAL B

- A = ABS
- P = PVC