

CLOSET FLANGE SPACER RING

886 SERIES

QuickSpacer™

SPECIFICATION

Sioux Chief 886 Series QuickSpacer closet flange spacer ring shall be installed as needed when closet flange will be below finished floor level. Spacer ring shall be molded from corrosion resistant material and install under closet flange. Closet flange shall be fastened to the floor, through the spacer ring.

MATERIALS

Polypropylene


DIMENSIONS

- A:** Overall diameter 7.0"
B: Inside diameter 5.22"
C: Overall height 0.75"

| | |
|------------------|-----------------|
| ITEM # SUBMITTED | _____ |
| JOB NAME | _____ |
| LOCATION | _____ |
| ENGINEER | _____ |
| CONTRACTOR | _____ |
| PO# | _____ TAG _____ |



886-ER

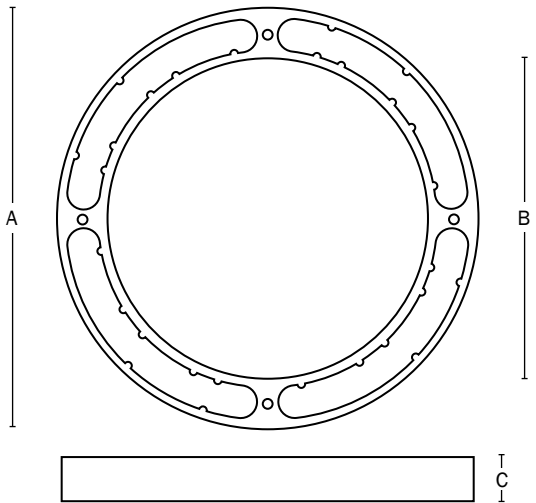

Item Number

886-ER