

MICRO FUEL LINE

» BLENDED POLYURETHANE

ATTRIBUTES

Sioux Chief micro fuel line is manufactured to specifications from polyurethane material. Fuel line has excellent flexibility and resilience and will not leach contaminants into fuels. Fuel line is ozone, weather and abrasion resistant and resistant to many oils, fuels, and grease. See website for chemical resistance listing.

Operating temperature range: -95°F (-71°C) to 200°F (93°C)

Material: Blended polyurethane

Color: Translucent orange

Hardness: Durometer Shore 80+/-3

APPLICATIONS


Fuel line for small motors, lawn mowers, boat motor, snow blowers

⚠ WARNING: Not intended for use with potable water.

PRESSURE RANGE

I.D.	O.D.	WALL	WORKING PRESSURE (PSI @70°F)
3/32"	3/16"	.0469"	133
7/64"	1/4"	.0703"	133
1/8"	1/4"	.0625"	133

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

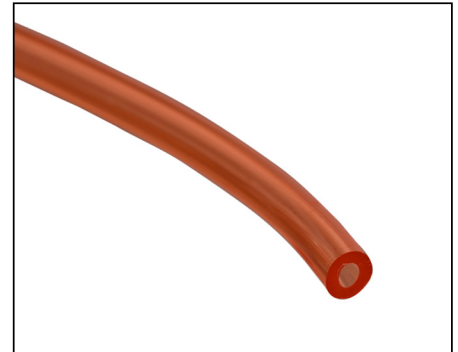

Create Item Number

900-14 A B R C D

e.g. **900-14010R01005:** Micro Fuel Line 7/64" ID x 1/4" OD, Orange, 100ft Reel

ID SIZE <u>A</u>	WALL <u>B</u>	LENGTH <u>C</u>	PACKAGE <u>D</u>
01 = 7/64" or 3/32"	0 = .0703"	0005 = 5ft	1 = Coil
02 = 1/8"	3 = .0625"	0010 = 10ft	5 = Reels
	8 = .0469"	0100 = 100ft	

*Not all size, wall thickness and length combinations available. Contact your local rep to confirm availability.