


Brass Hose Barb Fittings

/// Information & Installation Instructions

Information

Tomahawk offers a wide variety of styles of hose barb fittings including elbows, tees, and adaptors. Hose barb fittings can be used with any tubing soft enough to accept a clamp style connection including vinyl and rubber.

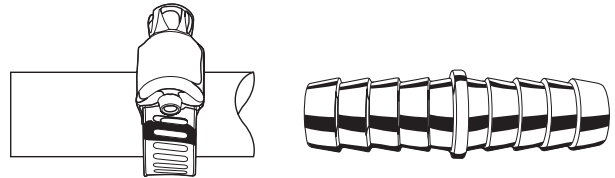

Installation Instructions

Cut tubing square and slide hose clamp onto the hose end. Push the barbed fitting into the hose until the end of the hose reaches the hex or stop ring, a non-petroleum lubricant may be used to assist in inserting the fitting into the tube. Move hose clamp over hose and barb and tighten the clamp with the appropriate tool (depending on the style of clamp) until a positive connection is made. **Do not over tighten.**

Specifications

Temperature: -40°F to 160°F

Working Pressure: 150psi. Do not exceed the recommended pressure rating of the tubing used.

