

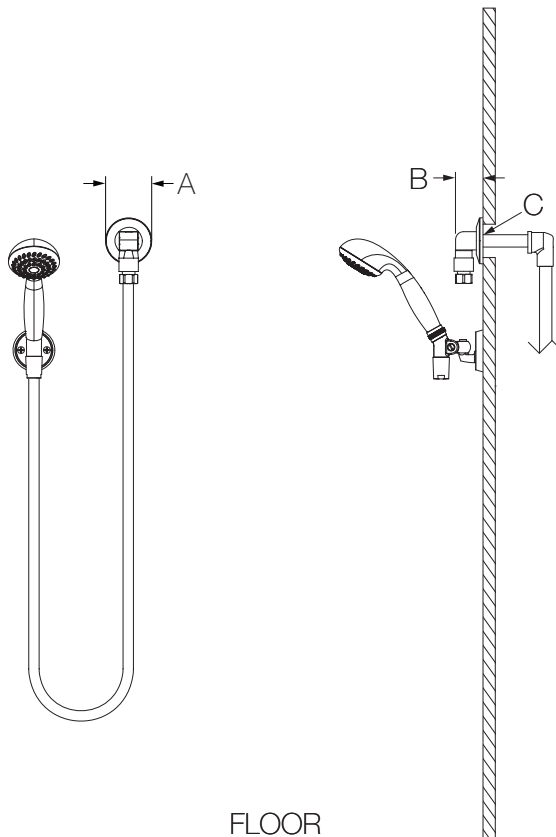


**FS**  
**1 Mode Hand Shower Unit**  
**Installation Guide**

<b>Model Numbers</b>	<b>Feature Highlights</b>
<input type="checkbox"/> <b>FS</b> <i>1 Mode Hand Shower Unit</i>	<ul style="list-style-type: none"> <li>• 1 mode hand shower</li> <li>• 3" diameter hand shower head</li> <li>• Dual checks for backflow protection</li> <li>• Cradle for hand shower mounting with swivel</li> <li>• 60" flexible metal hose</li> <li>• Standard 2.5 gpm (9.5 L/min) flow restrictor</li> <li>• Shall be metal and nonmetallic construction, plated in standard polished chrome finish</li> </ul>
<b>Options/Modifications</b>  <input type="checkbox"/> <b>-1.5</b>  <i>1.5 gpm (5.7 L/min) flow restrictor</i> <input type="checkbox"/> <b>-2.0</b> <i>2.0 gpm (7.6 L/min) flow restrictor</i> <input type="checkbox"/> <b>-STN</b> <i>Satin Nickel finish</i>  <b>Note:</b> Append appropriate -suffix to model number.	
<b>Compliance</b>  - ASME A112.18.1/CSA B125.1 <div style="text-align: right;">  </div>	<b>Warranty</b>  <b>Limited Lifetime</b> - to the original end purchaser in consumer installations. <b>5 Years</b> - for commercial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.

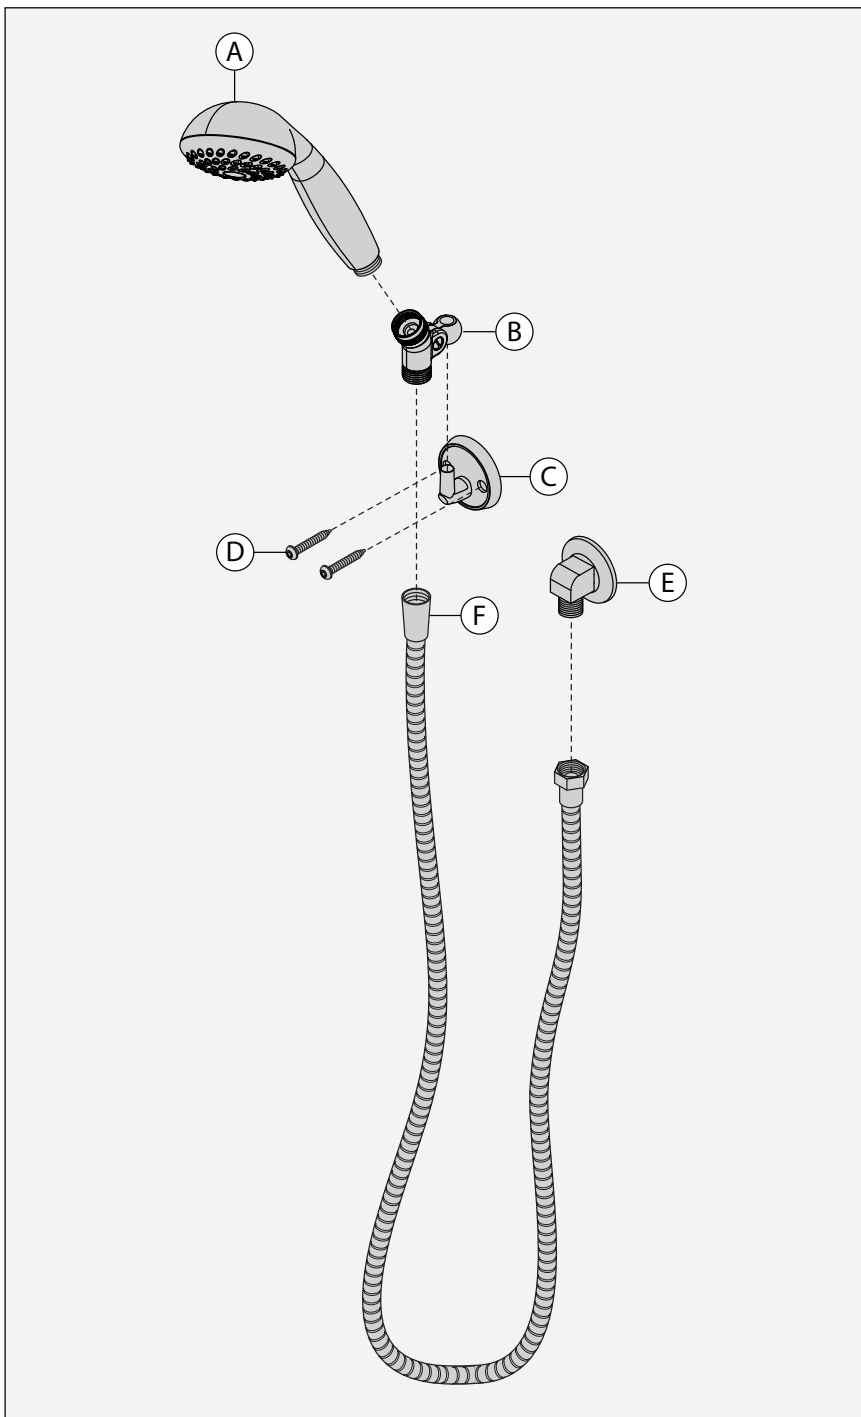
**Dimensions**



Measurements	
A	Ø 2-1/2", 64 mm
B	1-1/2", 38 mm
C	Male 1/2" IPS fitting must protrude 3/8" (10 mm) from finished wall






**Note:** Dimensions subject to change without notice.

## Parts Breakdown



Replacement Parts		
Item	Description	Part Number
A	Wand (chrome)	FP-1
	Wand (STN)	EF-100-STN
A	Wand	460C
B	Swivel	FP-1E
C	Cradle	FP-2
D	Mounting Screws	
E	Wall Elbow	40A
F	60" Hose	EF-104

**Note:** Apply finish code to part number for premium finish (wand becomes EF-100-STN).

Tools Required for Installation	
Adjustable Wrench	
Drill	
Phillips Head Screwdriver	
Plumber Tape	
Silicone	

### Notes:

- 1) Apply a bead of silicone around the perimeter of all shower trim installed flush to the finished wall.
- 2) Apply plumber tape to all threaded connections.

**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the state of California to cause cancer, birth defects, or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).