




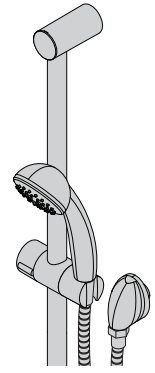

H321-V


1 Mode Hand Shower Unit

Installation Guide



Model Numbers	Feature Highlights
<input type="checkbox"/> H321-V <i>1 Mode Hand Shower Unit</i>	<ul style="list-style-type: none"> • 1 mode hand shower • 2-3/4" diameter hand shower head • Dual checks for backflow protection • 30" slide bar with cradle for hand shower mounting • 60" flexible metal hose • Standard 2.5 gpm (9.5 L/min) flow restrictor • Shall be metal and nonmetallic construction, plated in standard polished chrome finish
Options/Modifications	
<input type="checkbox"/> -1.5  <i>1.5 gpm (5.7 L/min) flow restrictor</i> <input type="checkbox"/> -2.0 <i>2.0 gpm (7.6 L/min) flow restrictor</i> <input type="checkbox"/> -STN <i>Satin Nickel finish</i> Note: Append appropriate -suffix to model number.	
Compliance - ASME A112.18.1/CSA B125.1 	Warranty Limited Lifetime - to the original end purchaser in consumer installations. 5 Years - for commercial installations. Refer to www.symmons.com/warranty for complete warranty information.


Dimensions

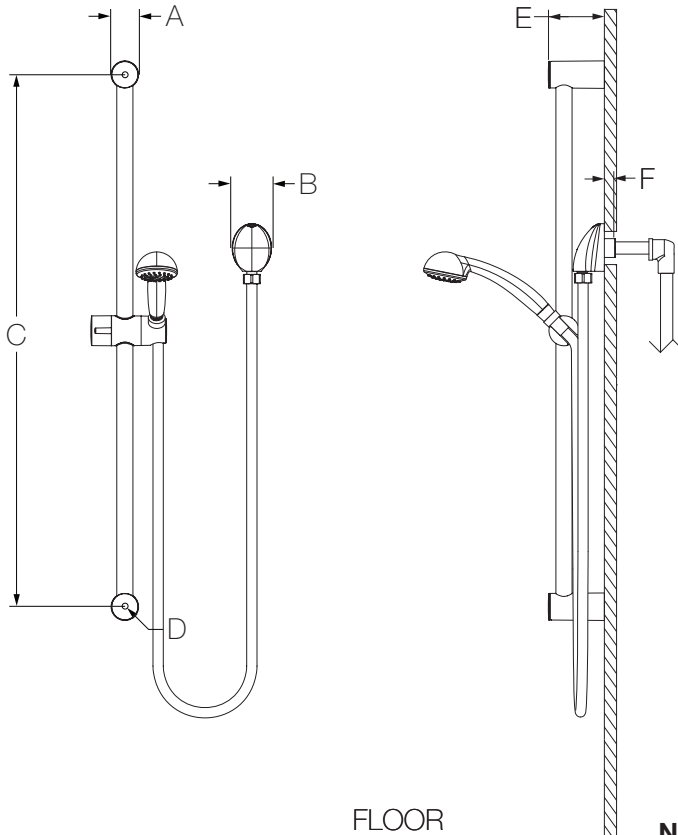

Measurements	
A	Ø 1-1/2", 38 mm
B	2-1/8", 54 mm
C	28-9/16", 725 mm
D	(2x) Hole Size: Ø 1/4", 6 mm
E	3", 76 mm
F	Male 1/2-14 NPT fitting must be recessed 1/4" (6 mm) from finished wall

Note: Dimensions subject to change without notice.

Tools Required

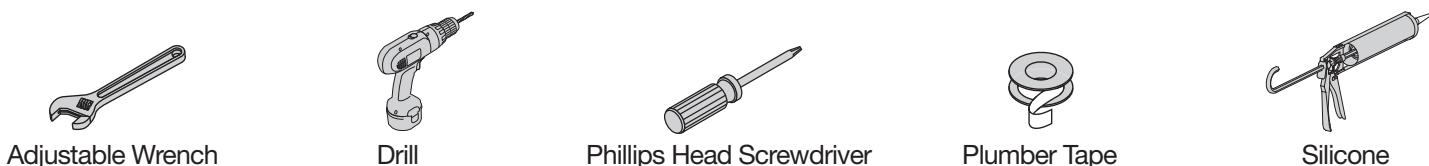

Adjustable Wrench

Drill

Phillips Head Screwdriver

Plumber Tape

Silicone

Parts Breakdown

Replacement Parts		
Item	Description	Part Number
A	(2x) Cap	
B	(2x) Screw	RA-003
C	(2x) Tile Anchor	
D	30" Bar	RA-005
E	48" Bar	RA-006
F	Hand Shower	EF-100
G	60" Hose	EF-02976
H	Wall Elbow	EF-105
I	Slide Assembly	RA-004

FOR SYSTEMS PURCHASED **AFTER** SEPTEMBER 1ST, 2018

Replacement Parts		
Item	Description	Part Number
A	(2x) Cap	
B	(2x) Screw	RA-013
C	(2x) Bar End	
D	(2x) Tile Anchor	
E	30" Bar	RA-010
F	48" Bar	RA-011
G	Hand Shower	EF-100
H	Slide Assembly	RA-012
I	60" Hose	EF-02976
J	Wall Elbow	EF-105

FOR SYSTEMS PURCHASED **BEFORE** SEPTEMBER 1ST, 2018

Notes:

- 1) Apply a bead of silicone around the perimeter of all shower trim installed flush to the finished wall.
- 2) Apply plumber tape to all threaded connections.

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the state of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.