

Location:

# SYMMONS® Canterbury™

## Hand Shower System 4503

### Specification Submittal

#### Feature Highlights

- Symmons hand shower system with lever handles.
- Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn.
- Wall/hand shower with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
- Flow rate 2.5 gpm (9.5 L/min)
- Metal construction with polished chrome finish


#### Model Numbers

- 4503 .....Hand Shower System with Symmons Temptrol® pressure balancing mixing valve p/n 4000-BODY
- 4503-TRM .....Trim only, valve must be ordered separately
- 4000-BODY ..... Symmons Temptrol® pressure balancing mixing valve without trim
- 4000-X-BODY ...Symmons Temptrol® pressure balancing mixing valve without trim. Valve includes integral service stops to allow water shut-off for service.

#### Finish Options / Modifications

Append appropriate -suffix to model number.

- STN Satin nickel
  - Polished chrome (standard finish)

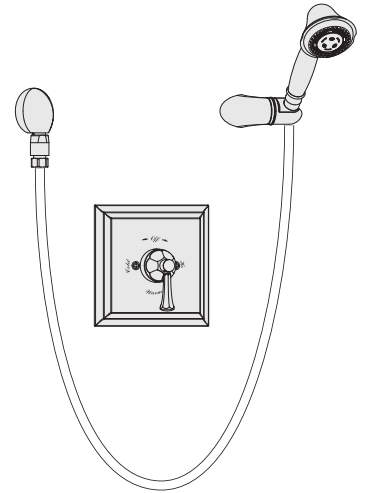

#### Options / Modifications

Append appropriate -suffix to model number.

- IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- X Symmons Temptrol® pressure balancing mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY. (Option only applies when ordering model 4503.)
- 2.0 2.0 (7.6 L/min) Flow rate restrictor
- 1.5 1.5 (5.7 L/min) Flow rate restrictor


#### Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

#### Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

## Dimensions *Canterbury Hand Shower System, 4503*

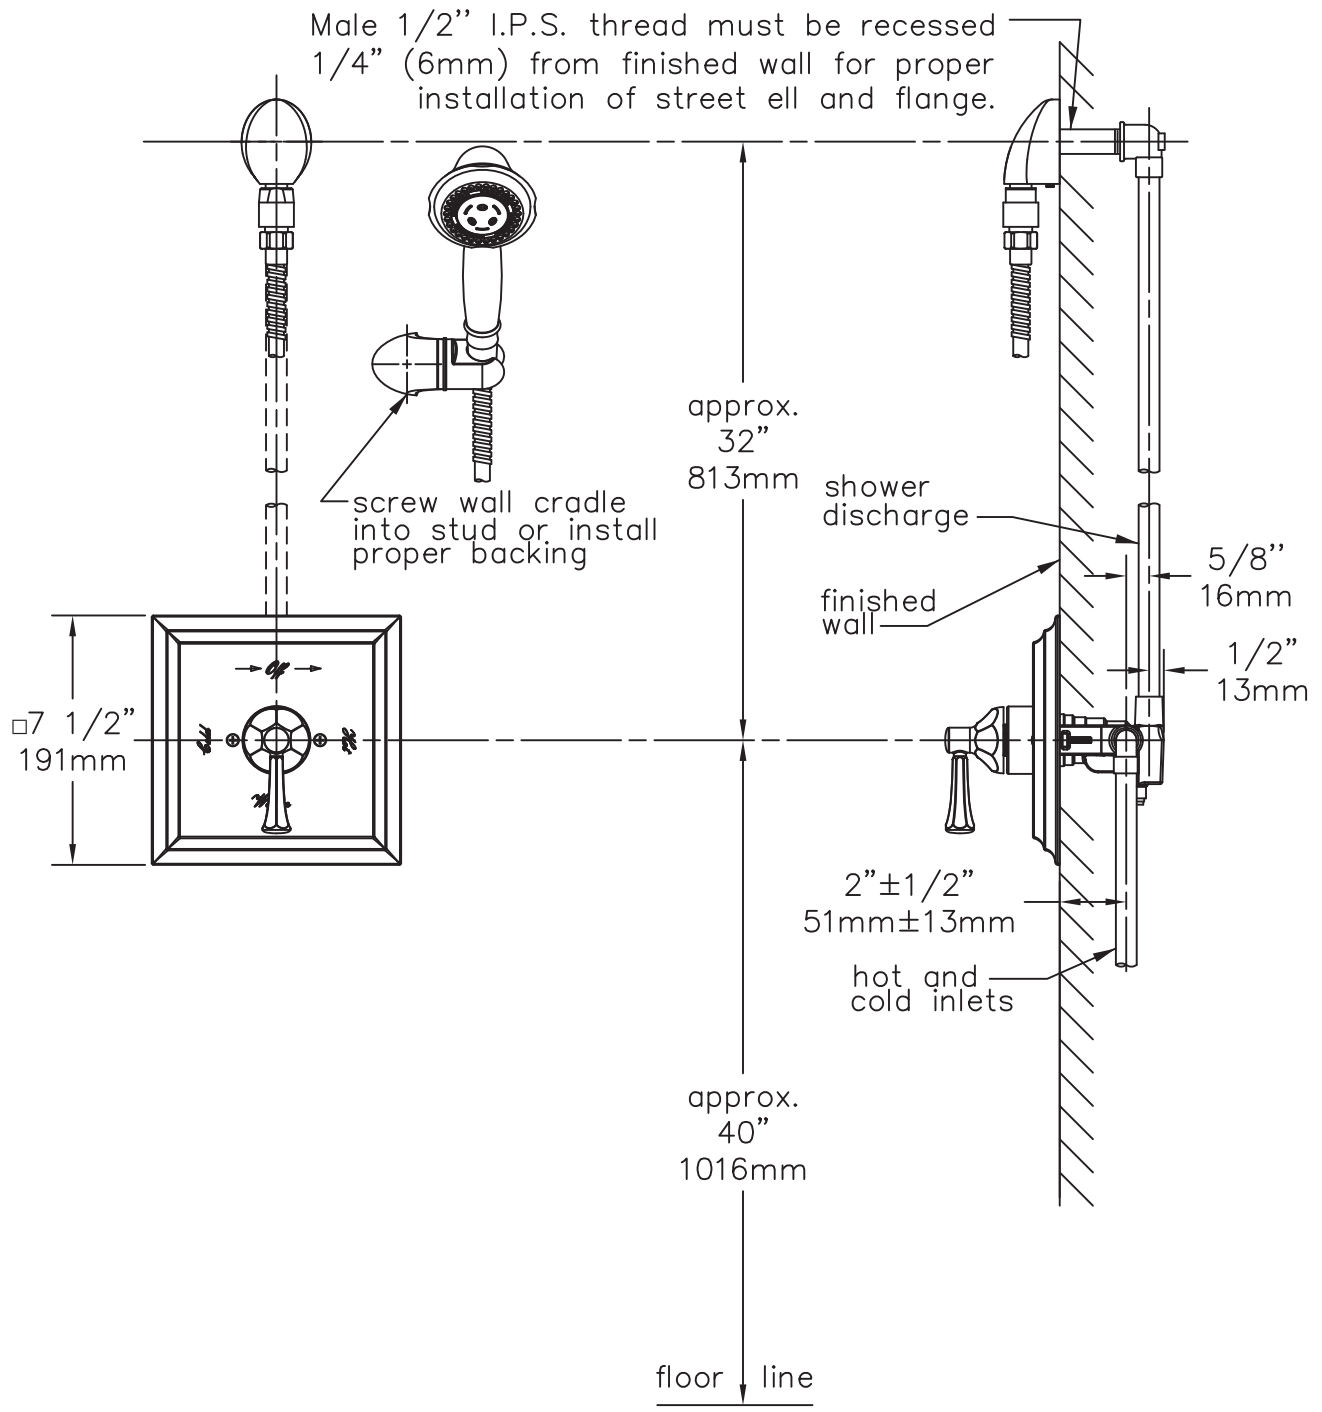

**Note:** Dimensions subject to change without notice.