


Location:



# SYMMONS® Safetymix®

## Shower-Hand Shower System 1-117-FSB-295 Specification Submittal

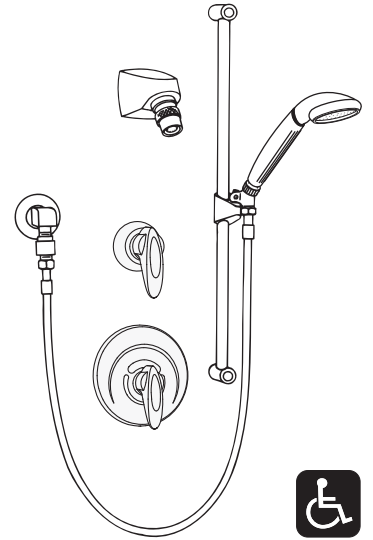

### Feature Highlights

- Symmons shower system with a lever handle.
- Symmons Safetymix® pressure balancing mixing valve with adjustable stop screw to limit handle turn
- Lever diverter with volume control for showerhead and hand shower
- Wall/hand shower with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and flange
- 30 inch slide bar for hand shower mounting
- Fre-Flo showerhead #4-295 with adjustable flood or mist spray, nozzle-type design for maximum protection against hard water mineral backup
- Spray face is non-clogging and non-removable
- Mounting fasteners for showerhead are vandal resistant recessed hex socket type
- Standard flow rate 2.5 gpm (9.5 L/min)  
*Optional lower flow rate restrictors available*
- Polished chrome finish

### Model Numbers

- 1-117-FSB-295 Shower System with Hand Shower

### Finish Options

*Append appropriate -suffix to model number.*

- Polished chrome (standard)

### Warranty

- Limited Lifetime - to the original end purchaser in residential/consumer installations.
- 5 years - for commercial installations

### Options / Modifications

*Append appropriate -suffix to model number.*

- CG** -1.5 1.5 gpm (5.7 L/min) flow restrictor
- 2.0 2.0 gpm (7.6 L/min) flow restrictor
- 72 72" hose in place of 60" hose
- A Anchor plate to simplify mounting on ceramic tile
- ADAHS 1 mode white hand shower unit with non-positive shut-off button in place of standard hand shower unit
- B48 48" adjusting bar in place of wall hook
- BB Back plate and thru bolts for extra thick wall up to 6 inches.  
Specify dimension for thicker wall.  
Enter dimension: \_\_\_\_\_
- BX Back connection with integral stops
- E External volume control on showerhead
- G Dial thermometer
- CG** -NS Non-shared diverter valve
- QD Quick disconnect
- R 72" white vinyl hose in place of 60" metal hose
- VB Elevated vacuum breaker with wall flanges in place of in-line vacuum breaker
- VP Vandal resistant escutcheon screws in place of standard screws
- X Integral stops - allows water shut off at valve for service. Recommended for use on all multiple commercial installations
- X-3/4" 3/4" valve to increase flow approximately 20%
- X-CHKS Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve

## Dimensions Symmetrix Shower & Hand Shower System, 1-117-FSB-295

