


Location:

SYMMONS® Visu-Temp®

Shower System & Hand Shower 1-1170VT-H401-V

Specification Submittal

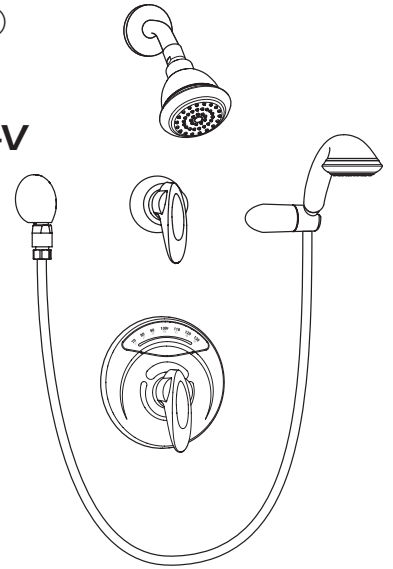

Feature Highlights

- Symmons Visu-Temp® pressure-balancing mixing valve with Clear-vue™ thermometer and adjustable stop screw to limit handle turn, #4-5000VT.
- Euro-flo single mode wall/hand shower with flexible metal hose, in-line vacuum breaker, wall connection, flange and cradle for mounting hand shower, #H401-V that includes wand #EF-118
- Lever diverter, 2DIV-BODY with volume control for showerhead and hand shower
- Euro-flo single mode self-cleaning showerhead #4-241
- Showerhead mounting arm and flange, # 300
- Standard flow rate is 2.5 gpm (9.5 L/min)
Optional aerator available in lower flow rates
- Polished chrome finish (standard)

Model Numbers

- 1-1170VT-H401-V Shower System with Symmons Visu-Temp® pressure balancing mixing valve, #4-5000VT

Finish Options / Modifications

Append appropriate -suffix to model number.

- STN Satin nickel
 - Polished chrome (standard finish)

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

Standards / Certifications

ASME A112.18.1/CSA B125.1



Options / Modifications

Append appropriate -suffix to model number.

- TRM Trim only, valve body ordered separately
- X Symmons Temptrol® pressure balancing mixing valve includes integral service stops to allow water shut-off for service
- X-CHKS Integral check stops: Used where a positive shut-off device is used down stream of mixing valve
- X-3/4 3/4 inch valve to increase water flow approximately 20%
- L/HD Shower head not included
Includes showerhead arm and flange only
- L/HS Hand Shower wand not included
Includes hose, in-line vacuum breaker, wall connections, cradle and flange only
- 72 6 foot hand shower hose in place of standard 5 foot hose
- R Vinyl hose in place of flexible metal hose
- QD Quick disconnect on hand shower unit
- VB Elevated vacuum breaker with wall flange on hand shower unit in place of in-line vacuum breaker
- B30 30 inch slide bar in place of wall cradle
- 2.0 2.0 gpm (7.6 L/min) flow rate restrictor
- 1.5 1.5 gpm (5.7 L/min) flow rate restrictor

Dimensions *Visu-Temp Shower System with Hand Shower, 1-1170VT-H401-V*

