


# 1-117VT-FS Visu-Temp® Shower System with Hand Spray


Visu-Temp® Pressure-Balancing mixing valve with integral thermometer and adjustable stop screw to limit handle turn. Lever diverter with volume control for shower head and hand spray. Super shower head with arm and flange. Wall/hand shower with flexible 5' metal hose, in-line vacuum breaker, wall connection and flange.

## Modifications:

- Suffix X:** Integral service stops—allows water shut-off at valve for service
- Suffix X-CHKS** Integral check stops
- Suffix X-3/4** 3/4" valve to increase flow approximately 20%
- Suffix NU** NU-Arm head bracket in place of 300 arm and flange
- Suffix B30** 30" adjusting bar in place of wall hook
- Suffix H401-V** Wall cradle in place of wall hook
- Suffix 6:** 6' hose in place of standard 5' hose
- Suffix R:** Vinyl hose in place of standard metal hose
- Suffix 1.5:** 1.5 (5.7 L/min) Flow rate restrictor
- Suffix 2.0:** 2.0 (7.6 L/min) Flow rate restrictor
- Suffix STN:** Satin Nickel finish
- Suffix TRM:** Trim only, valve body sold separately

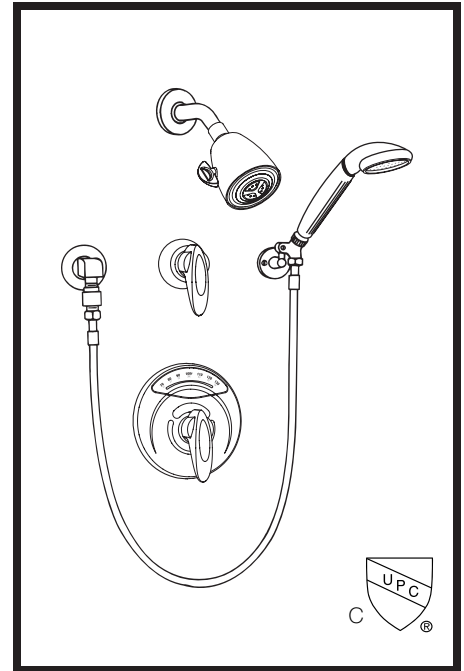

**SYMMONS PRODUCTS MEET  
ASME A12.18.1/ CSA B125.1  
AND ALL KNOWN FLOW RATE  
REQUIREMENTS.  
Shower Heads and Hand Showers  
2.5 GPM (9.5 L/min)**

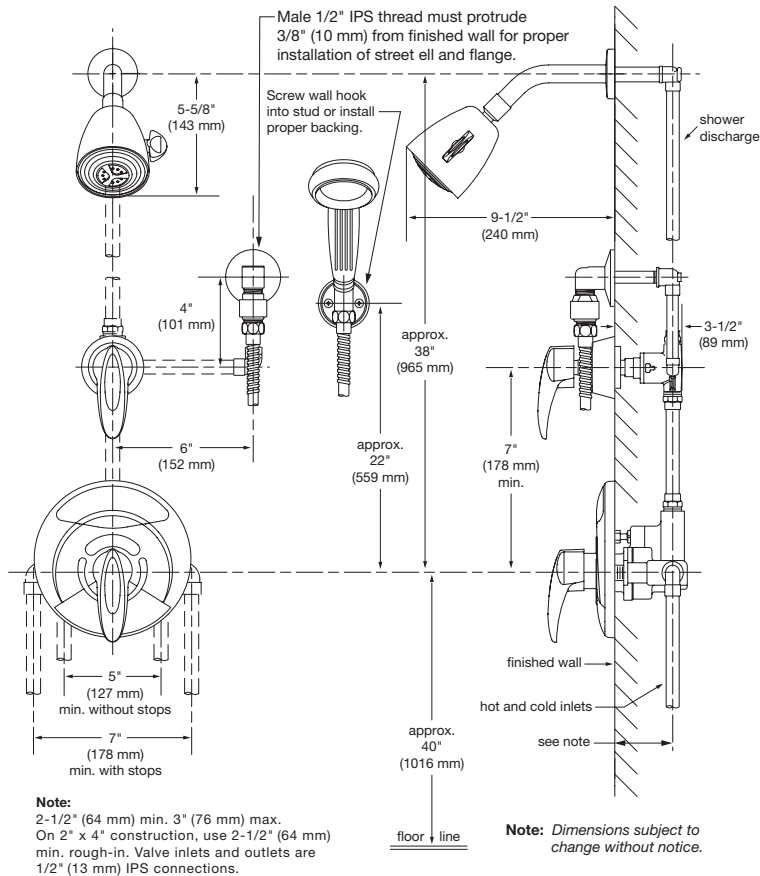

**Job/Location**

.....  
.....

**Engineer**

.....  
.....

**Contractor**

.....  
.....

This drawing to be used for rough-in installation only. All floor to center dimensions optional. Concealed piping and fittings not furnished by manufacturer. Dimensions are for ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations. For complete installation, adjustment and service information see installation instructions.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184  
Phone: (800) 796-6667 ■ Fax: (800) 961-9621  
Website: [symmons.com](http://symmons.com) ■ [gethelp@symmons.com](mailto:gethelp@symmons.com)

Copyright © 2019 Symmons Industries, Inc. ■ ZV-1434 REV D ■ 091219

