

1-217-FS

Safetymix®

Tub/Shower/Hand Shower System


Safetymix® Pressure-Balancing mixing valve with lever handle and adjustable stop screw to limit handle turn. Super shower head with arm and flange. Lever diverter with integral volume control. Tub spout. Wall/hand shower with flexible 5' metal hose, in-line vacuum breaker, wall connection and flange. Wall hook for hand shower mounting.

Modifications:

- Suffix 72:** 72" hose in place of 60" hose
- Suffix B30:** 30" adjusting bar in place of wall hook
- Suffix QD:** Quick-disconnect for hand spray units
- Suffix T24:** 24" grab bar in place of standard hand shower unit
- Suffix VB:** Elevated vacuum breaker with wall flanges
- Suffix X:** Integral service stops—allows water shut-off at valve for service
- Suffix X-CHKS:** Integral check stops—for use in installations where a positive shut-off device is used downstream of mixing valve
- Suffix X-3/4:** 3/4" valve to increase flow approximately 20%



**SYMMONS PRODUCTS MEET
ASME A112.18.1/CSA B125.1
AND ALL KNOWN FLOW RATE
REQUIREMENTS.
Shower Heads and Hand Showers
2.5 GPM (9.5 L/min)**

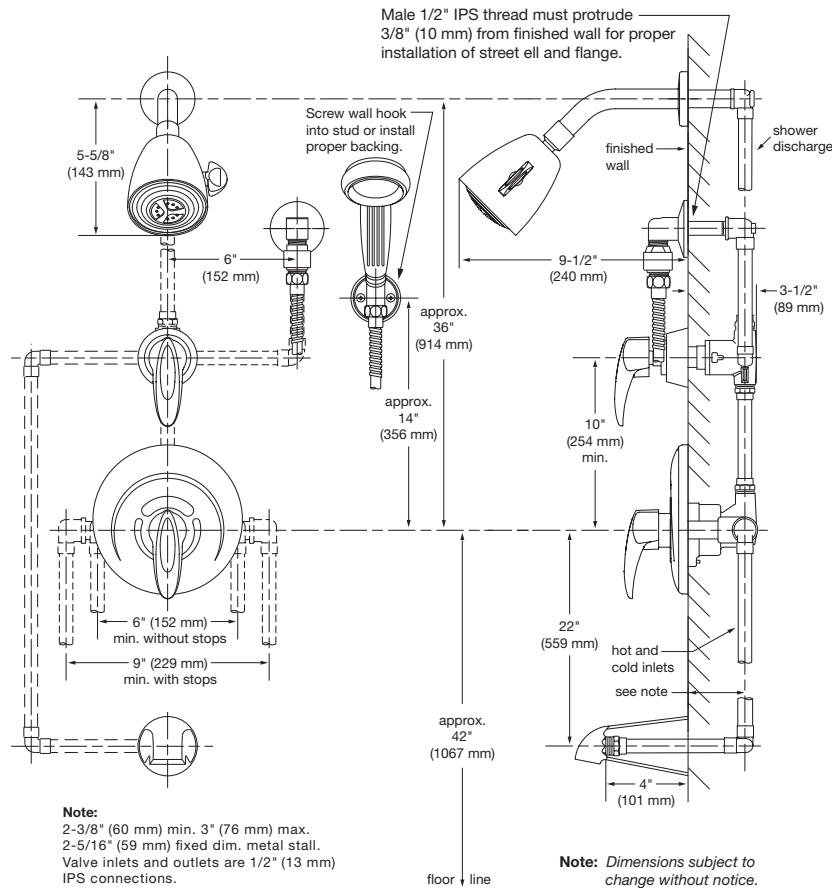

Job/Location

.....

Engineer

.....

Contractor

.....

This drawing to be used for rough-in installation only. All floor to center dimensions optional. Concealed piping and fittings not furnished by manufacturer. For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations. For complete installation, adjustment and service information see installation instructions.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
 Phone: (800) 796-6667 ■ Fax: (800) 961-9621
 Website: symmons.com ■ gethelp@symmons.com

Copyright © 2018 Symmons Industries, Inc. ■ ZV-1439 REV D ■ 031519

