


# 1-3170VT-H401-V Visu-Temp® Tub/Shower/ Hand Shower System


Visu-Temp® Pressure-Balancing mixing valve with Clear-Vue™ thermometer and adjustable stop screw to limit handle turn. Lever diverter with volume control for shower head, hand shower and tub spout. Single mode showerhead with arm and flange. Tub spout. Single mode wall/hand shower with flexible 5' metal hose, dual checks for backflow protection, wall connection and flange. Cradle for hand shower mounting.

## Modifications:

- Suffix 1.5:** 1.5 gpm (5.7 L/min) flow restrictor
- Suffix 2.0:** 2.0 gpm (7.6 L/min) flow restrictor
- Suffix B30:** 30" slide bar in place of cradle
- Suffix STN:** Satin Nickel finish
- Suffix X:** Integral service stops—allows water shut-off at valve for service
- Suffix X-3/4** 3/4" valve to increase flow approximately 20%
- Suffix X-CHKS** Integral check stops—for use in installations where a positive shut-off device is used downstream of mixing valve

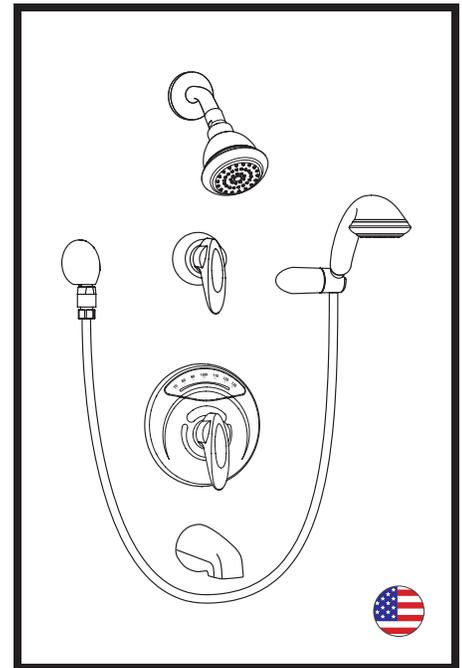

**SYMMONS PRODUCTS MEET  
ASME A112.18.1  
AND ALL KNOWN FLOW RATE  
REQUIREMENTS.**

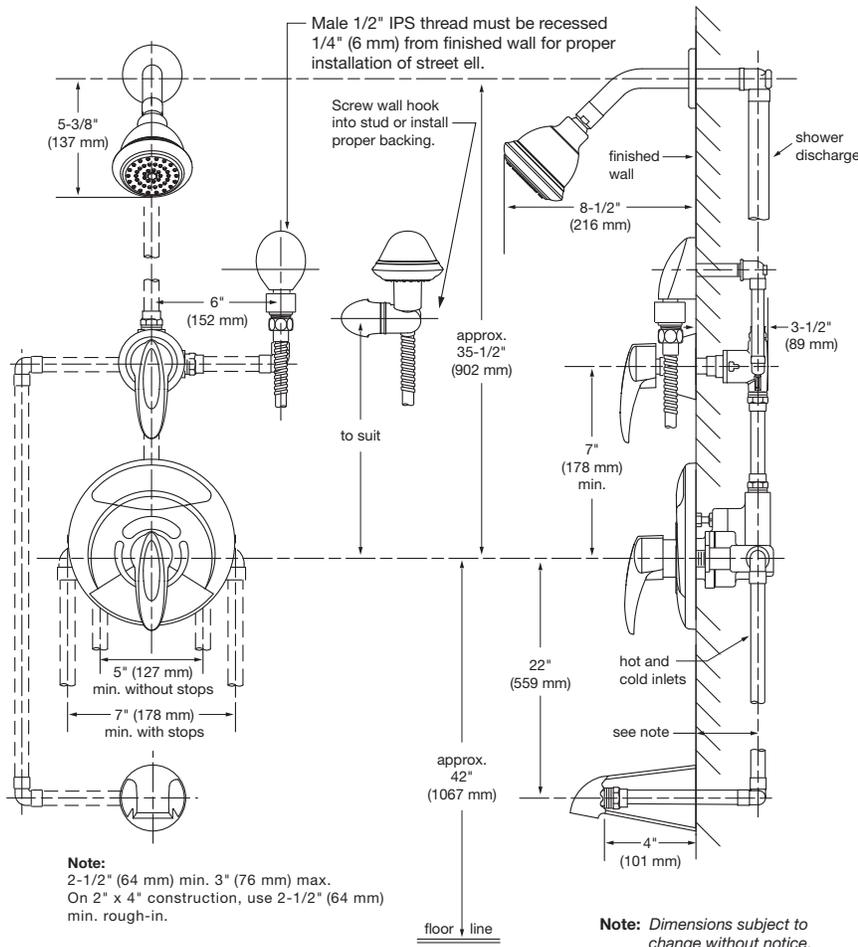

**Job/Location**

.....

.....

**Engineer**

.....

.....

**Contractor**

.....

.....

This drawing to be used for rough-in installation only. All floor to center dimensions optional. Concealed piping and fittings not furnished by manufacturer. For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations. For complete installation, adjustment and service information see installation instructions.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184  
Phone: (800) 796-6667 ■ Fax: (800) 961-9621  
symmons.com ■ gethelp@symmons.com

Copyright © 2018 Symmons Industries, Inc. ■ ZV-1447 REV B ■ 112718

