






Location:



36EX-SQ2
Exposed Shower Riser
Specification Submittal

<p>Feature Highlights</p>	<p>Model Numbers</p>
<ul style="list-style-type: none"> • 1 mode hand shower • 1 mode showerhead • 60" flexible metal hose • Diverter included for toggling between hand shower and showerhead • Includes column/slide bar and hand shower bracket • 2.5 gpm (9.5 L/min) standard flow restrictor • Components shall be metal and nonmetallic construction, plated in standard polished chrome finish 	<p><input type="checkbox"/> 36EX-SQ2 Exposed Shower Riser with Hand Shower and Showerhead</p> <hr/> <p>Compliance</p> <p>- ASME A112.18.1/CSA B125.1</p> <div style="text-align: right;">  </div>
<p>Options/Modifications</p>	<p>Warranty</p>
<p><input type="checkbox"/> -1.5  <i>1.5 gpm (5.7 L/min) flow restrictor</i></p> <p><input type="checkbox"/> -STN <i>Satin Nickel finish</i></p> <p>Note: Append appropriate -suffix to model number.</p>	<p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete warranty information.</p>

Dimensions

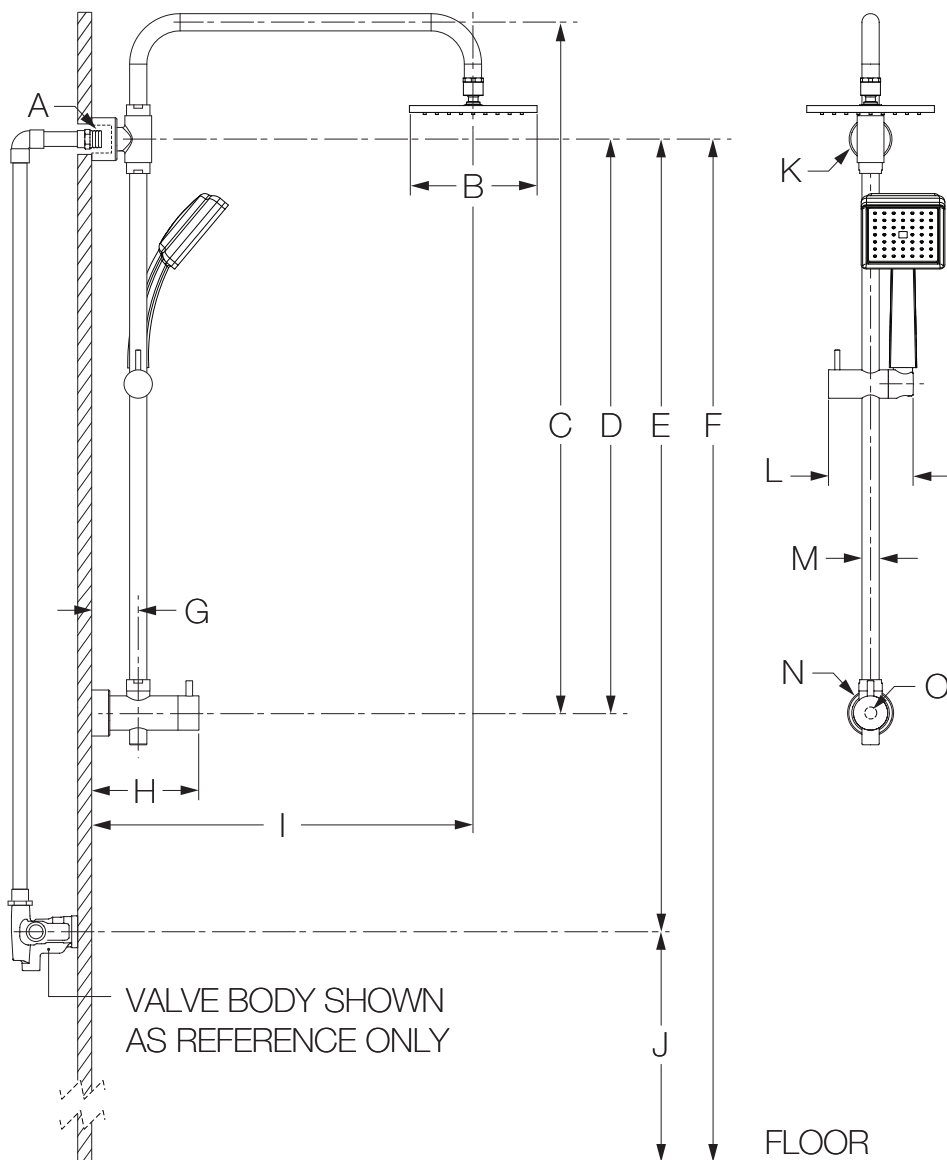

Note: Dimensions subject to change without notice.



Important Notes:

- 1) If the distance for item E is less than 29" (737 mm), Exposed Shower Riser is not appropriate for your application.
- 2) Hand shower wands that exceed 0.8 lbs. are not recommended for Exposed Shower Riser.

Measurements	
A	Male 1/2" NPT thread must protrude 1/2" (13 mm) from finished wall
B	Sq. 6", 152 mm
C	27-1/2", 699 mm
D	22", 559 mm
E	For Shower Systems: Min. 29", 737 mm from centerline of shower output to valve For Tub/Shower Systems: Min. 29", 737 mm from centerline of shower output to valve
F	Ref. 77", 1956 mm
G	2-3/16", 55 mm
H	5-1/16", 128 mm
I	17-15/16", 456 mm
J	For Shower Systems: Min. 42", 1067 mm Max. 48", 1219 mm For Tub/Shower Systems: Ref. 32", 813 mm
K	Ø 2", 51 mm
L	4", 102 mm
M	Ø 13/16", 21 mm
N	Ø 2-3/16", 56 mm
O	Hole Size Ø 5/16", 8 mm