


4-174

Symmons® Square Shower Head

Symmons Square three mode shower head with ball joint connection.

Modifications:

- Suffix 1.5:** 1.5 gpm (5.7 L/min) flow restrictor
- Suffix 2.0:** 2.0 gpm (7.6 L/min) flow restrictor

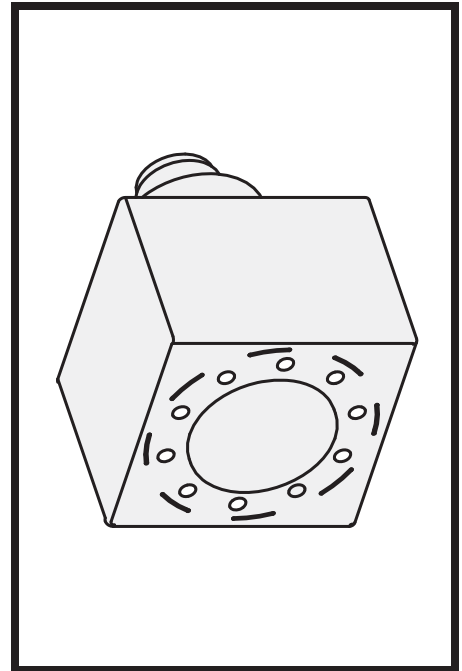

**SYMMONS PRODUCTS MEET
ASME A112.18.1/CSA B125.1
AND ALL KNOWN FLOW RATE
REQUIREMENTS.
Shower Heads and Hand Showers
2.5 GPM (9.5 L/min)**

Job/Location

.....
.....

Engineer

.....
.....

Contractor

.....
.....

For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations.