



Location:

# SYMMONS® Identity™

the smart choice™

6704-TRM, 6704TRMTC  
Tub/Hand Shower Trim  
Specification Submittal



### Feature Highlights

- Identity Tub/Hand Shower Trim
- Requires Temptrol® Pressure Balancing Tub/Shower Valve
- Metal lever handles
- Cradle for hand shower wand
- Dual checks for backflow protection
- 60" flexible metal hose
- 5-1/2" diverter tub spout
- 1 mode hand shower wand with easy to clean nozzles
- 2.5 gpm (9.5 L/min) flow restrictor
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 6704TRMTC)
- For optional in-line vacuum breaker order p/n EF-109

### Model Numbers

- 6704-TRM**  
Tub/Hand Shower Trim,  
Temptrol Pressure Balancing Tub/Shower Valve ordered separately
- 6704TRMTC**  
Tub/Hand Shower Trim with TA-10 flow control spindle and  
T-12A cap assembly, must order Temptrol valve with Test Cap

### Compliance




- ASME A112.18.1/CSA B125.1



### Warranty


**Limited Lifetime** - to the original end purchaser in consumer/residential installations.  
**5 Years** - for industrial/commercial installations.  
 Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.  
 Go to [www.symmons.com/register](http://www.symmons.com/register) to register your Symmons product.

### Options/Modifications

- 1.5**  1.5 gpm (5.7 L/min) flow restrictor
- 2.0** 2.0 gpm (7.6 L/min) flow restrictor
- 72** 72" hose in place of 60" hose
- ADACHS** ADA hand shower wand (chrome)
- ADAHS** ADA hand shower wand (white)
- B30** 30" slide bar in place of wall cradle
- B48** 48" slide bar in place of wall cradle
- EX** Exposed column/slide bar, hand shower bracket and hand shower wand (35EX)
- H321-V** 1 mode hand shower unit with slide bar
- H323-V** 3 mode hand shower unit with slide bar
- H323-V-48** 3 mode hand shower unit with 48" slide bar
- H3524** 24" decorative slide/grab bar with ADA wand
- H3536** 36" decorative slide/grab bar with ADA wand
- L2** Less hand shower wand
- LP**  Loop handle
- LR**  Lever handle
- QD** Quick-disconnect on hand shower units
- R** 60" white vinyl hose in place of 60" metal hose
- REB** Rebuild trim kit, includes TA-10 and TA-4
- SS** Slip spout on any tub/shower unit
- T724** 24" slide bar/grab bar with ADA wand
- T736** 36" slide bar/grab bar with ADA wand
- T748** 48" slide bar/grab bar with ADA wand
- VB** Elevated vacuum breaker
- VP** Vandal resistant escutcheon screws in place of standard screws
- STN** Satin Nickel finish

**Note:** Append appropriate -suffix to model number.

## Dimensions

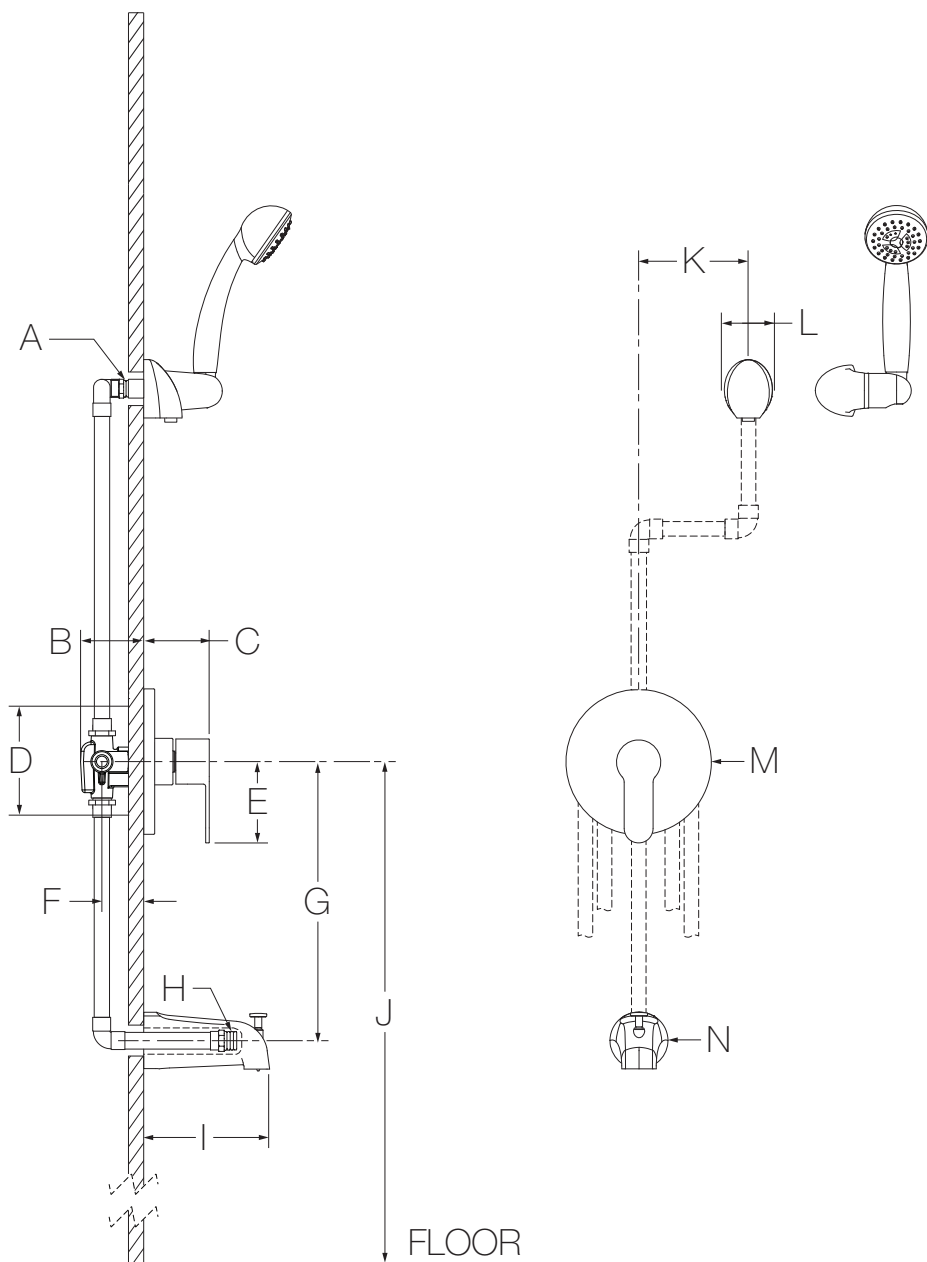

| Measurements |   |
|--------------|---|
| A            | Male 1/2" NPT fitting must be recessed 1/4" (6 mm) from finished wall |
| B            | 3-1/2", 89 mm   |
| C            | 2-7/8", 73 mm   |
| D            | Shower Valve Hole Size<br>Min. Ø 3", 76 mm<br>Max. Ø 4", 102 mm       |
| E            | 3-1/2", 89 mm   |
| F            | Rough-in<br>2-3/8" ± 1/2", 60 mm ± 13 mm                              |
| G            | 12", 305 mm   |
| H            | Male 1/2-14 NPT fitting must protrude 4" (102 mm) from finished wall  |
| I            | 5-1/2", 140 mm  |
| J            | Ref. 32", 813 mm  |
| K            | 6", 152 mm  |
| L            | 2-1/8", 54 mm   |
| M            | Ø 6-3/8", 162 mm  |
| N            | Ø 2-1/2", 64 mm   |

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see F as reference).
- 4) Dimensions subject to change without notice.