

Location:



## Hand Shower, H501-V Specification Submittal



### Model Numbers

- H501-V Hand Shower

### Options / Modifications

*Append appropriate -suffix to model number.*

- CG** -1.5 1.5 gpm (5.7 L/min) flow rate restrictor
- 2.0 2.0 gpm (7.6 L/min) flow rate restrictor
- 72 72" hose in place of standard 60" hose
- QD Quick-disconnect for hand shower hose

### Finish Options

*Append appropriate -suffix to model number.*

- STN Satin nickel finish
  - Polished chrome finish (standard)

### Feature Highlights

- Single function wall mounted hand shower with spray head
- 5 foot flexible metal hose with in-line vacuum breaker, wall connection, cradle and flange
- Standard flow rate at 2.5 gpm (9.5 L/Min)
- Polished chrome finish (standard)

### Standards / Certifications


-ASME A112.18.1/CSA B125.1



### Warranty

- Limited Lifetime - to the original end purchaser in residential / consumer installations.
- 5 years - for commercial installations

## Dimensions *Hand Shower, H501-V*

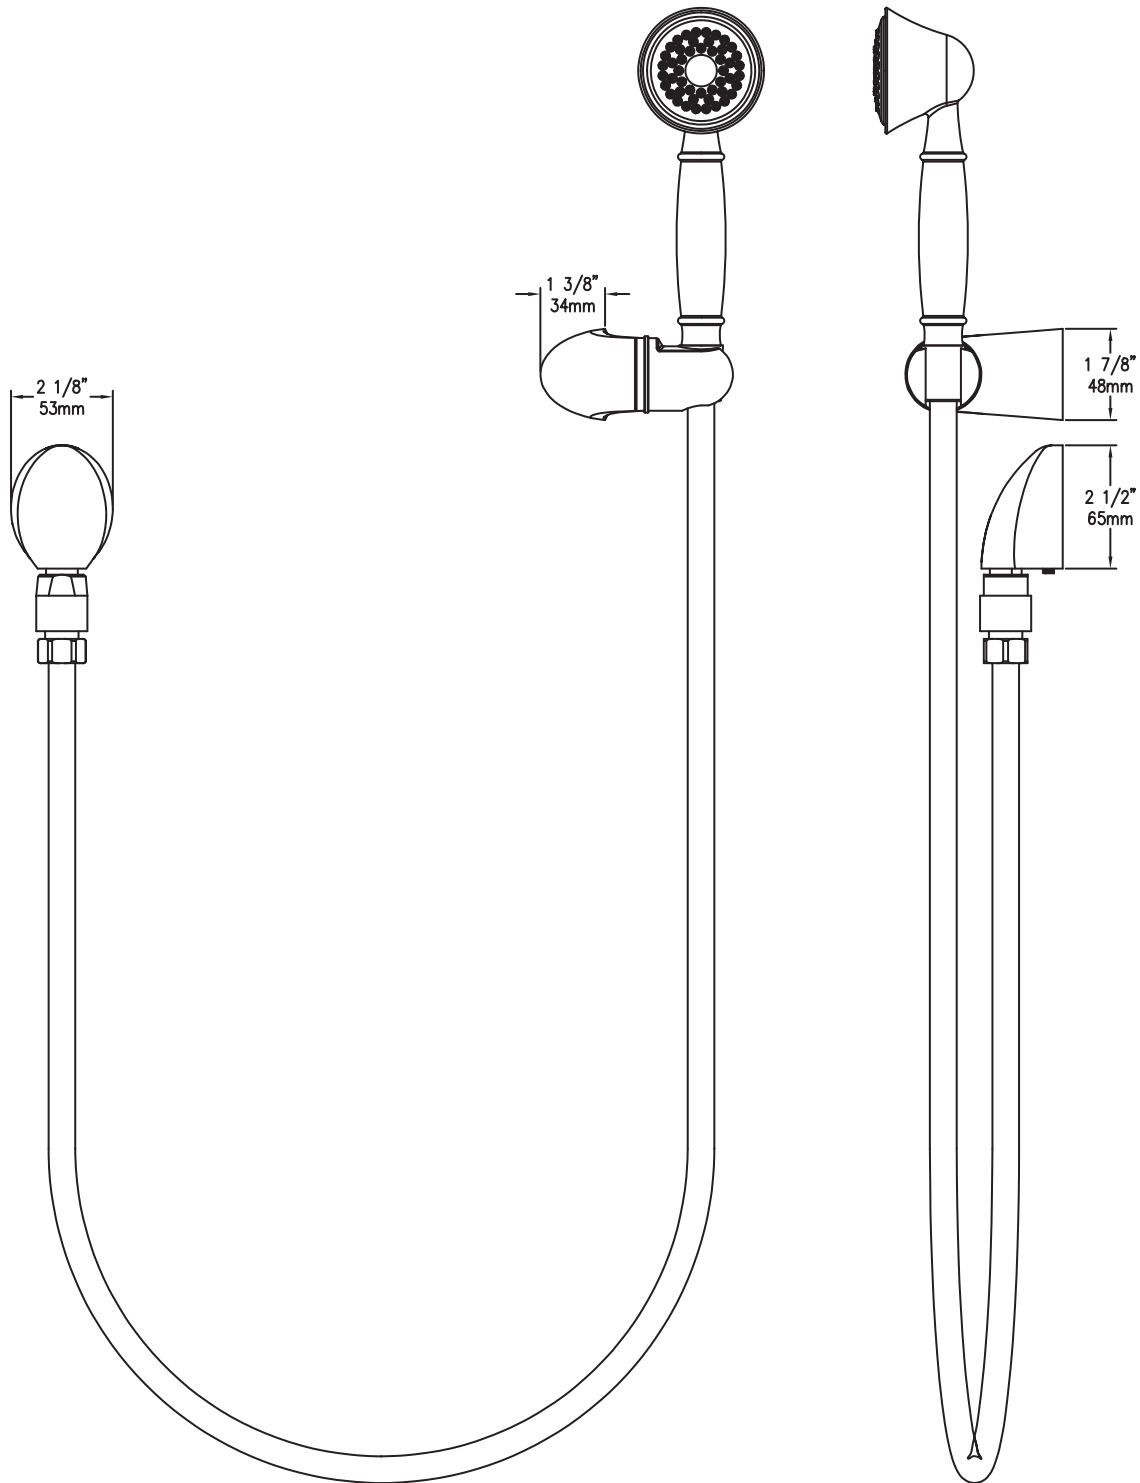

**Note:** Dimensions subject to change without notice.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184  
Phone: (800) 796-6667 ■ Fax: (800) 961-9621  
Website: [symmons.com](http://symmons.com) ■ Email: [gethelp@symmons.com](mailto:gethelp@symmons.com)

Copyright © 2017 Symmons Industries, Inc. ■ ZV-1720 REV A ■ 033117

  
**SYMMONS**<sup>®</sup>  
the smart choice™