



Location:

S-3604-H321-V-TRM, S3604H321TRMTC
Tub/Hand Shower Trim
Specification Submittal



Feature Highlights

- Duro Tub/Hand Shower Trim
- Requires Temptrol® Pressure Balancing Tub/Shower Valve
- Integral diverter control
- Metal lever handle
- 7" non-diverter tub spout
- 30" slide bar for hand shower
- 60" flexible metal hose
- 1 mode hand shower
- Dual checks for backflow protection
- 2.5 gpm (9.5 L/min) flow restrictor
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S3604H321TRMTC)
- For optional in-line vacuum breaker order p/n EF-109

Model Numbers

- S-3604-H321-V-TRM**
Tub/Hand Shower Trim with integral diverter control, Temptrol Pressure Balancing Tub/Shower Valve ordered separately
- S3604H321TRMTC**
Tub/Hand Shower Trim with integral diverter control, TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

Compliance



- ASME A112.18.1/CSA B125.1



Warranty


Limited Lifetime - to the original end purchaser in consumer/residential installations.
5 Years - for industrial/commercial installations.
 Refer to www.symmons.com/warranty for complete warranty information.
 Go to www.symmons.com/register to register your Symmons product.

Options/Modifications

- 1.5**  1.5 gpm (5.7 L/min) flow restrictor
- 2.0** 2.0 gpm (7.6 L/min) flow restrictor
- 72** 72" hose in place of 60" hose
- ADACHS** ADA hand shower wand (chrome)
- ADAHS** ADA hand shower wand (white)
- EX** Exposed column/slide bar, hand shower bracket and hand shower wand (36EX)
- H323-V** 3 mode hand shower unit with slide bar
- H323-V-48** 3 mode hand shower unit with 48" slide bar
- H3624** 24" decorative slide/grab bar with ADA wand
- H3636** 36" decorative slide/grab bar with ADA wand
- L2** Less hand shower wand
- LW**  Wide lever handle (chrome finish only)
- QD** Quick-disconnect on hand shower units
- R** 60" white vinyl hose in place of 60" metal hose
- REB** Rebuild trim kit, includes TA-10 and TA-4
- SS** Slip spout on any tub/shower unit
- T4** Alternative 361TS, non-diverter square tub spout
- T724** 24" slide bar/grab bar with ADA wand
- T736** 36" slide bar/grab bar with ADA wand
- T748** 48" slide bar/grab bar with ADA wand
- VB** Elevated vacuum breaker
- VP** Vandal resistant escutcheon screws in place of standard screws
- BBZ** Brushed Bronze finish
- MB** Matte Black finish
- STN** Satin Nickel finish


Note: Append appropriate -suffix to model number.

Dimensions

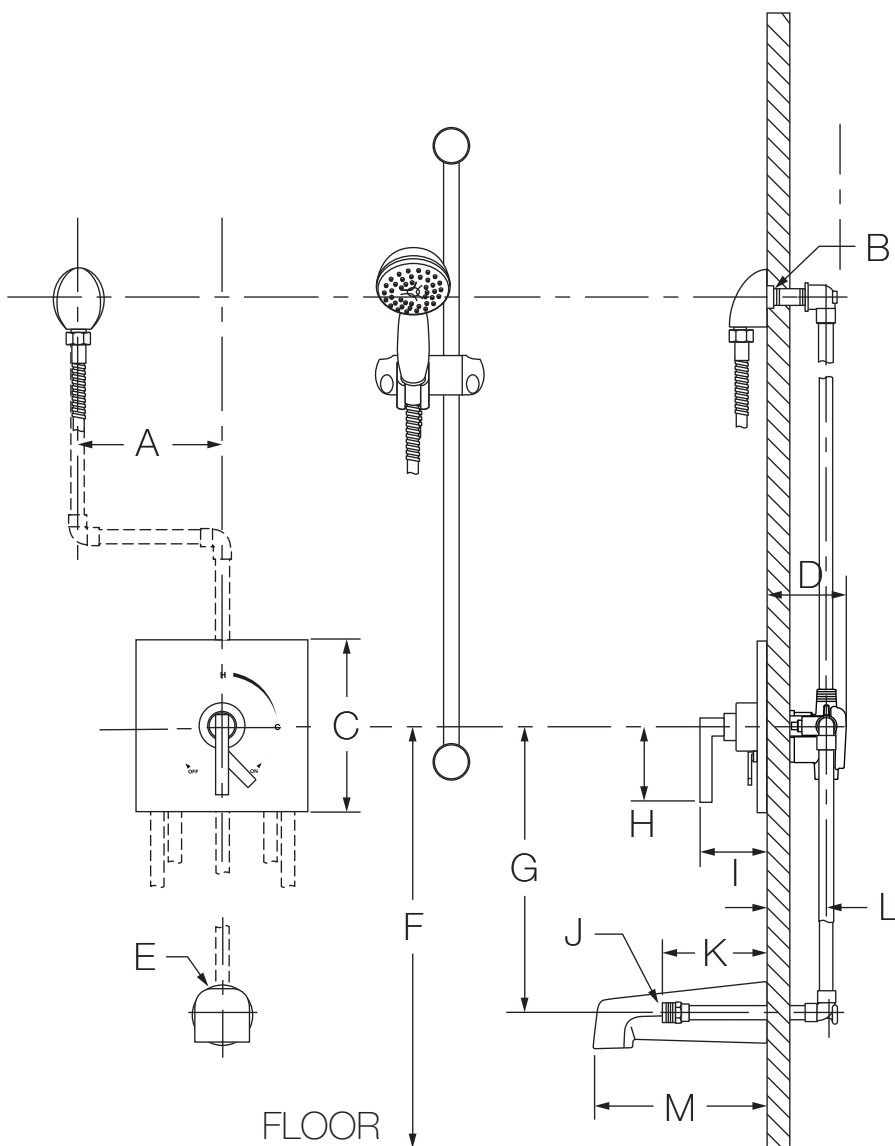

Measurements	
A	6", 152 mm
B	Male 1/2-14 NPT thread must be recessed 1/4" (6 mm) from finished wall
C	Sq. 7-1/2", 191 mm
D	3-1/2", 89 mm
E	Ø 2-1/2", 64 mm
F	Ref. 32", 813 mm
G	Ref. 12", 305 mm
H	3-1/8", 79 mm
I	3-1/2", 89 mm
J	Male 1/2-14 NPT fitting must protrude 5-1/4" (133 mm) from finished wall
K	5-1/4", 133 mm
L	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
M	7", 178 mm
N	2-1/4", 57 mm
O	2-1/2", 64 mm
P	5-5/8", 143 mm
Q	Male 1/2-14 NPT fitting must protrude 4-7/16" (113 mm) from finished wall

-T4

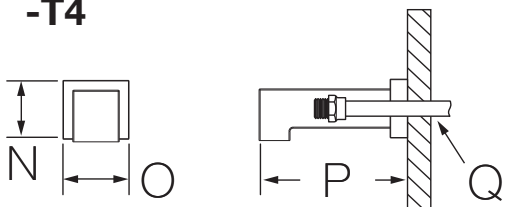

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see L as reference).
- 4) Dimensions subject to change without notice.