



Location:

SYMMONS® DS Creations

the smart choice™


SLC-8802-1.5 (SLC-4512-WINDS-1.5)
Two Handle Centerset Lavatory Faucet
Specification Submittal



Model Numbers	Specification
<input type="checkbox"/> SLC-8802-1.5 <i>Two Handle Centerset Lavatory Faucet</i>	Two Handle Centerset Lavatory Faucet featuring 4" mounting configuration shall include ceramic cartridges, 1/2" IPS inlet connections, metal drain assembly and 1.5 gpm (5.7 L/min) aerator. Faucet shall be made from metal construction, plated in standard polished chrome finish.
Warranty Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete warranty information.	



Dimensions

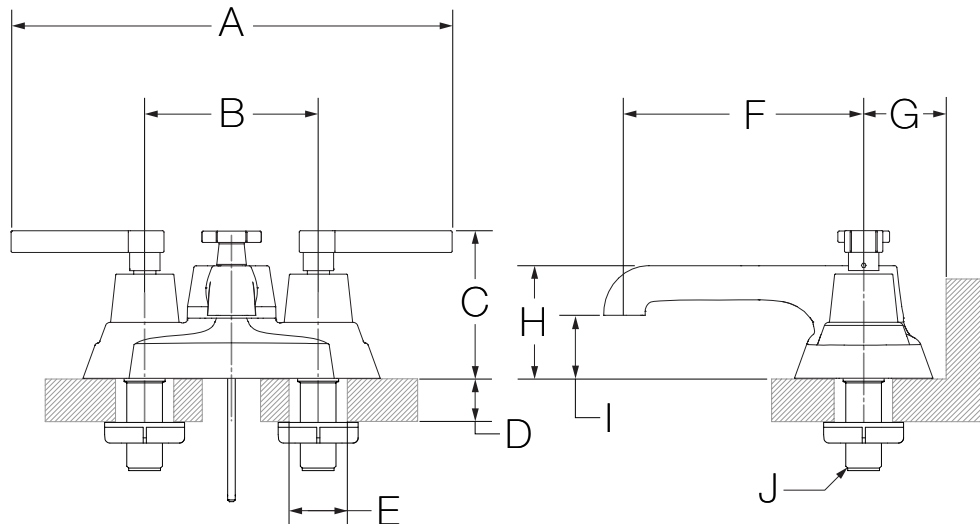

Measurements	
A	10-1/8", 257 mm
B	4", 102 mm
C	3-1/2", 89 mm
D	Deck Thickness Ref. Max. 2", 51 mm
E	(3x) Hole Size Min. Ø 1", 25 mm Max. Ø 1-1/2", 38 mm
F	5-1/2", 140 mm
G	To Backsplash Min. 2", 51 mm
H	2-5/8", 67 mm
I	1-1/2", 38 mm
J	1/2-14 NPSM

Note: Dimensions subject to change without notice.



Emplacement:




SLC-8802-1.5 (SLC-4512-WINDS-1.5)
 Robinet de salle de bain monopièce à deux poignées
Présentation des spécifications

Numéro de modèle	Spécification
<input type="checkbox"/> SLC-8802-1.5 <i>Robinet de salle de bain monopièce à deux poignées</i>	Le robinet de salle de bain monopièce à deux poignées présente une configuration de fixation de 4 po et comprend des cartouches en céramique, des conduits d'alimentation en eau IPS de 1/2 po, un ensemble pour drain 50/50 et un aérateur standard de 1,5 gpm (5,7 L/min). Composants faits de laiton et de matériaux non métalliques au fini chrome poli standard.
Garantie	
À vie limitée - à l'acheteur original dans les installations du consommateur ou résidentielles. 5 ans - pour des installations commerciales et industrielles. Se reporter au site www.symmons.com/warranty (en anglais) pour l'information complète concernant la garantie.	



Dimensions

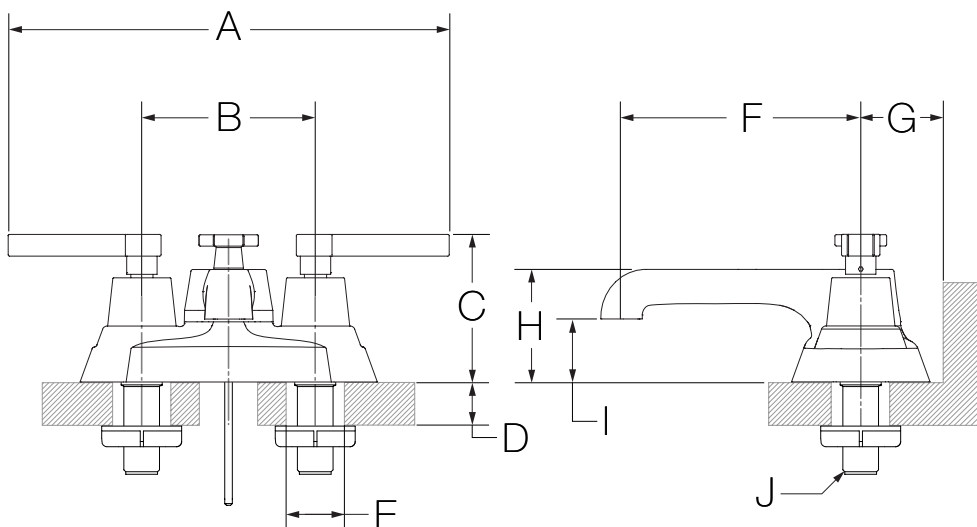

Mesures	
A	10-1/8 po, 257 mm
B	4 po, 102 mm
C	3-1/2 po, 89 mm
D	Épaisseur du comptoir Max. 2 po, 51 mm
E	(3x) Taille du trou Min. Ø 1 po, 25 mm Max. Ø 1-1/2 po, 38 mm
F	5-1/2 po, 140 mm
G	Min. 2 po, 51 mm
H	2-5/8 po, 67 mm
I	1-1/2 po, 38 mm
J	1/2-14 NPSM

Remarque: Les dimensions sont sujettes à changer sans préavis.