









Location:




**SLW-3512-1.5, SLW-3510-1.5**  
**Two Handle Widespread Lavatory Faucet**  
**Specification Submittal**

Model Numbers	Feature Highlights
<input type="checkbox"/> <b>SLW-3512-1.5</b> <i>Two Handle Widespread Lavatory Faucet with Lift Rod and Metal Drain Assembly</i> <input type="checkbox"/> <b>SLW-3510-1.5</b> <i>Two Handle Widespread Lavatory Faucet without Lift Rod Hole and Metal Drain Assembly</i>	<ul style="list-style-type: none"> <li>• 8" to 16" mount configuration</li> <li>• Quarter turn ceramic cartridges</li> <li>• 1/2" IPS inlet connections</li> <li>• 7-1/4" height</li> <li>• Lift rod and metal drain assembly (SLW-3512-1.5 only)</li> <li>• Standard 1.5 gpm (5.7 L/min) flow rate</li> <li>• Faucet shall be metal construction, plated in standard polished chrome finish</li> </ul>
Options/Modifications	Compliance
<input type="checkbox"/> <b>-0.5</b>  <i>0.5 gpm (1.9 L/min) flow restrictor</i> <input type="checkbox"/> <b>-1.0</b>  <i>1.0 gpm (3.8 L/min) flow restrictor</i> <input type="checkbox"/> <b>-G</b> <i>Grid drain (SLW-3510-1.5 only)</i> <input type="checkbox"/> <b>-H2</b>  <i>Alternative blade handle (chrome and satin nickel finish only)</i> <input type="checkbox"/> <b>-H3</b>  <i>Alternative cross handle (chrome and satin nickel finish only)</i> <input type="checkbox"/> <b>-NA</b> <i>Non-aerated laminar flow outlet (2.2 gpm - 8.3 L/min)</i> <input type="checkbox"/> <b>-BBZ</b> <i>Brushed Bronze finish (SLW-3512 only)</i> <input type="checkbox"/> <b>-MB</b> <i>Matte Black finish (SLW-3512 only)</i> <input type="checkbox"/> <b>-STN</b> <i>Satin Nickel finish (SLW-3512 only)</i>	<p>-ASME A112.18.1/CSA B125.1          -NSF/ANSI 61.9; NSF/ANSI 372          -WaterSense 1.5 gpm, 1.0 gpm</p>  
<p><b>Note:</b> Append appropriate -suffix to model number.</p>	<p><b>Warranty</b></p> <p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.  <b>5 Years</b> - for industrial/commercial installations.          Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p>

## Dimensions

### SLW-3512-1.5

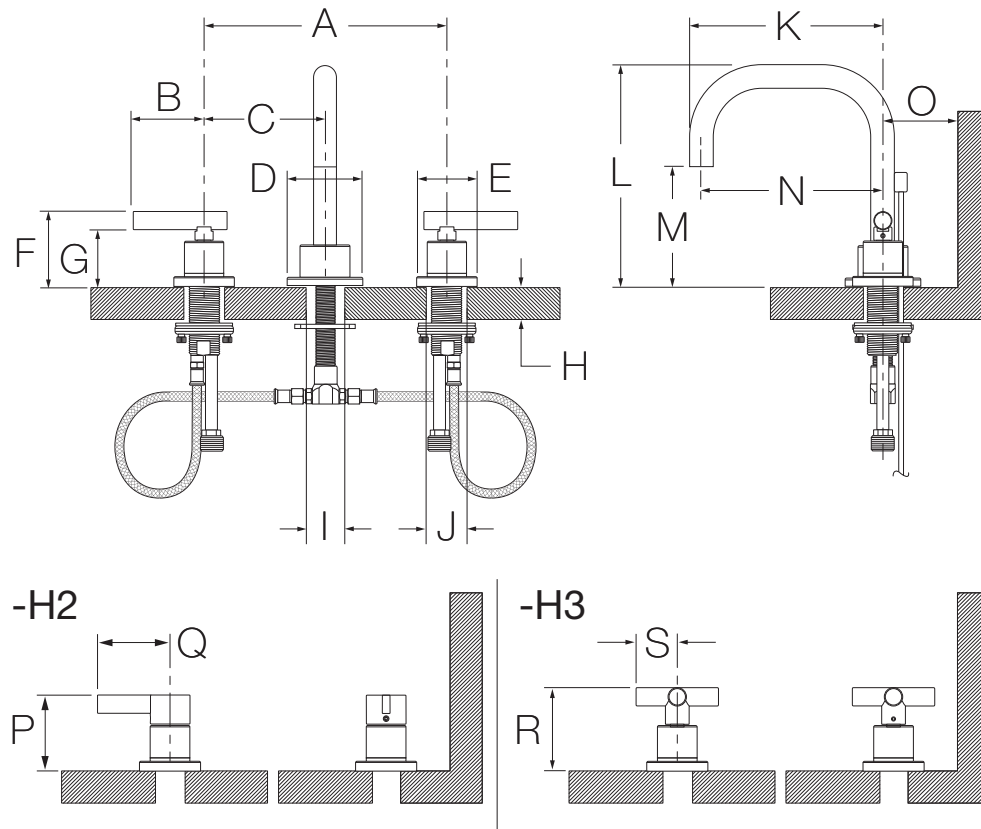

Measurements	
A	Min. 8", 203 mm Max. 16", 406 mm
B	2-3/8", 60 mm
C	Min. 4", 102 mm
D	2-1/2", 64 mm
E	2", 51 mm
F	2-1/2", 64 mm
G	1-7/8", 48 mm
H	Deck Thickness Ref. Max. 1-3/8", 35 mm
I	Hole Size Min. Ø 1-1/2", 38 mm Max. Ø 1-5/8", 41 mm
J	(2x) Hole size Min. Ø 1-1/8", 29 mm Max. Ø 1-1/2", 38 mm
K	6-3/8", 162 mm
L	7-1/4", 185 mm
M	3-7/8", 98 mm
N	6", 152 mm
O	Min. 1-1/2", 38 mm
P	2-1/2", 64 mm
Q	2-3/8", 60 mm
R	2-3/4", 70 mm
S	1-3/8", 35 mm

**Note:** Dimensions subject to change without notice.