












Location:



**SLW-3622-1.5**  
**Two Handle Widespread Lavatory Faucet**  
**Specification Submittal**

Model Numbers	Feature Highlights
<input type="checkbox"/> <b>SLW-3622-1.5</b> <i>Two Handle Widespread Lavatory Faucet</i>	<ul style="list-style-type: none"> <li>• 8" to 16" mount configuration</li> <li>• Quarter turn ceramic cartridges</li> <li>• 1/2" IPS inlet connections</li> <li>• 4" height</li> <li>• Lift rod and metal drain assembly</li> <li>• Standard 1.5 gpm (5.7 L/min) flow rate</li> <li>• Faucet shall be metal construction, plated in standard polished chrome finish</li> </ul>
Finish Options/Modifications	Compliance
<input type="checkbox"/> <b>-0.5</b>  <i>0.5 gpm (1.9 L/min) flow restrictor</i> <input type="checkbox"/> <b>-1.0</b>  <i>1.0 gpm (3.8 L/min) flow restrictor</i> <input type="checkbox"/> <b>-H2</b>  <i>Alternative lever handle (Chrome and Satin Nickel only)</i> <input type="checkbox"/> <b>-H3</b>  <i>Alternative lever handle (Chrome and Satin Nickel only)</i> <input type="checkbox"/> <b>-BBZ</b> <i>Brushed Bronze finish</i> <input type="checkbox"/> <b>-MB</b> <i>Matte Black finish</i> <input type="checkbox"/> <b>-STN</b> <i>Satin Nickel finish</i>	<p>-ASME A112.18.1/CSA B125.1          -NSF/ANSI 61.9; NSF/ANSI 372          -WaterSense 1.5 gpm</p>  
<p><b>Note:</b> Append appropriate -suffix to model number.</p>	Warranty
	<p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.  <b>5 Years</b> - for industrial/commercial installations.          Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p>

## Dimensions

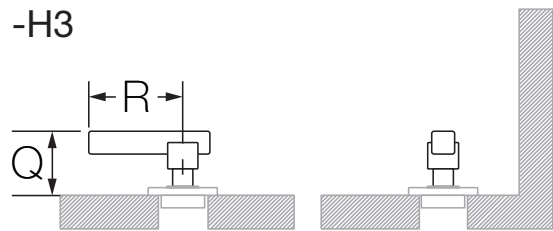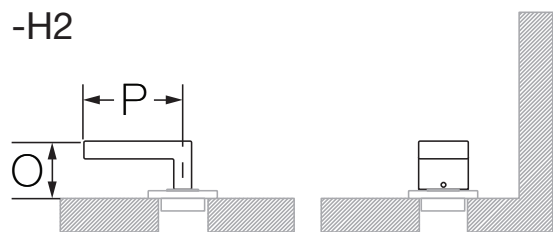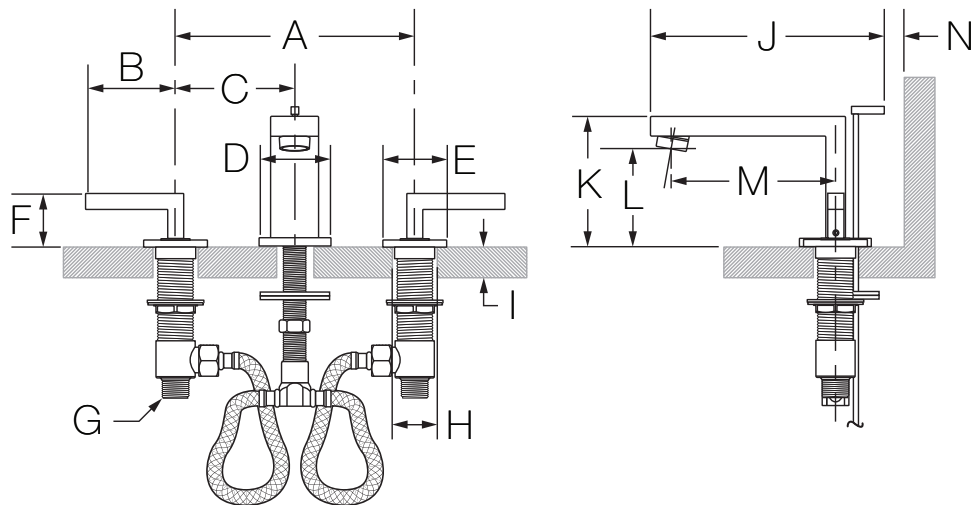

**Note:** Dimensions subject to change without notice.

Measurements	
A	Min. 8", 203 mm Max. 16", 406 mm
B	2-3/4", 70 mm
C	4", 102 mm
D	2-1/8", 54 mm
E	2", 51 mm
F	1-5/8", 40 mm
G	1/2-14 NPSM
H	(3x) Hole size Min. Ø 1-1/4", 32 mm Max. Ø 1-3/8", 35 mm
I	Deck Thickness Ref. Min. 7/8", 22 mm Max. 2-3/8", 60 mm
J	6-3/8", 161 mm
K	4", 102 mm
L	3", 76 mm
M	5", 127 mm
N	Min. 1/2", 13 mm
O	1-5/8", 41 mm
P	2-3/4", 70 mm
Q	1-3/4", 44 mm
R	2-5/8", 67 mm