







LAJOS 50 & 67 CHANDELIER

SLCH818; SLCH816

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

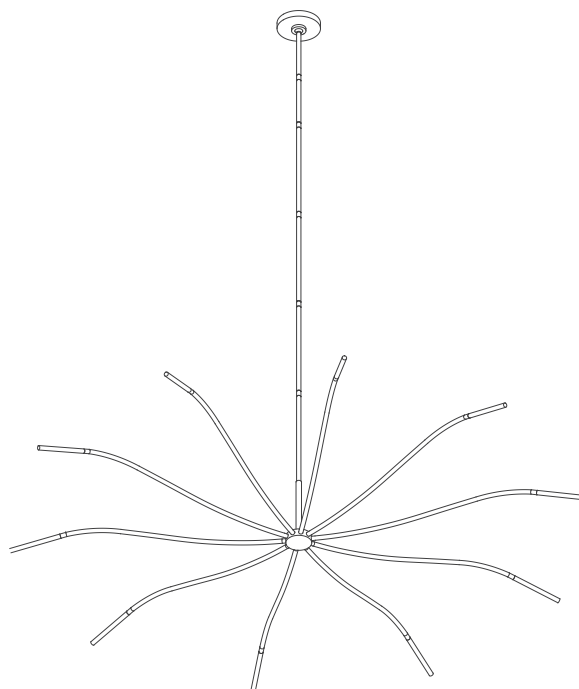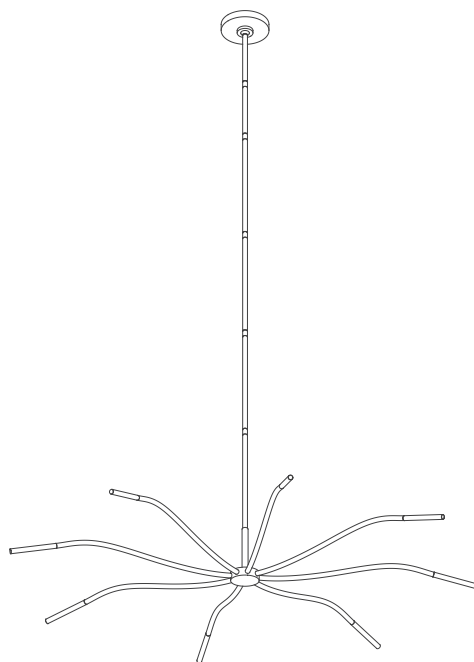

FIXTURE PARTS

- A. Junction Box (Not Included)
- B. Wire Nut Connections
- C. Short Mounting Plate
- D. Mounting Screws
- E. Swivel Ball
- F. Canopy
- G. Collar Nut
- H. Stem Assembly
- I. Fixture
- J. Driver
- K. Tall Mounting Plate
- L. Driver Housing
- M. Cable Lock
- N. Cable Lock Screws
- O. Tube
- P. Shades

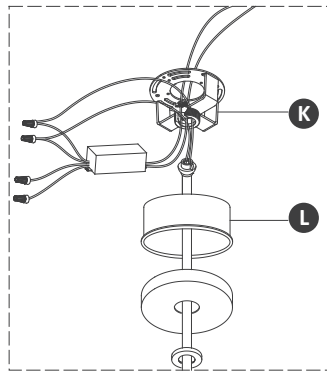


Diagram 1



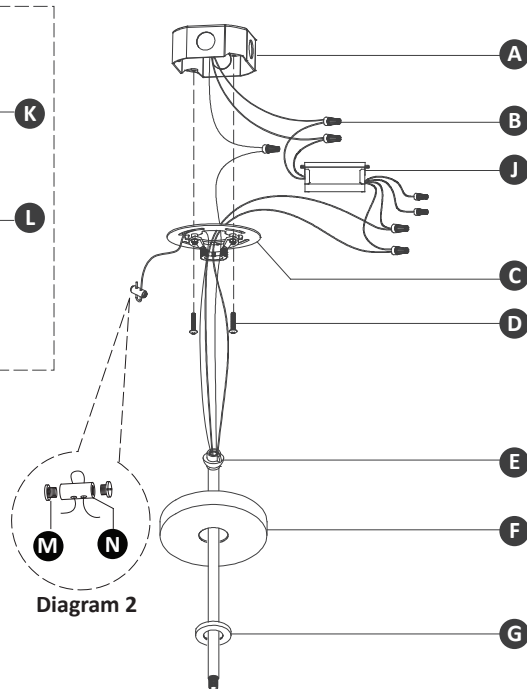


Diagram 2

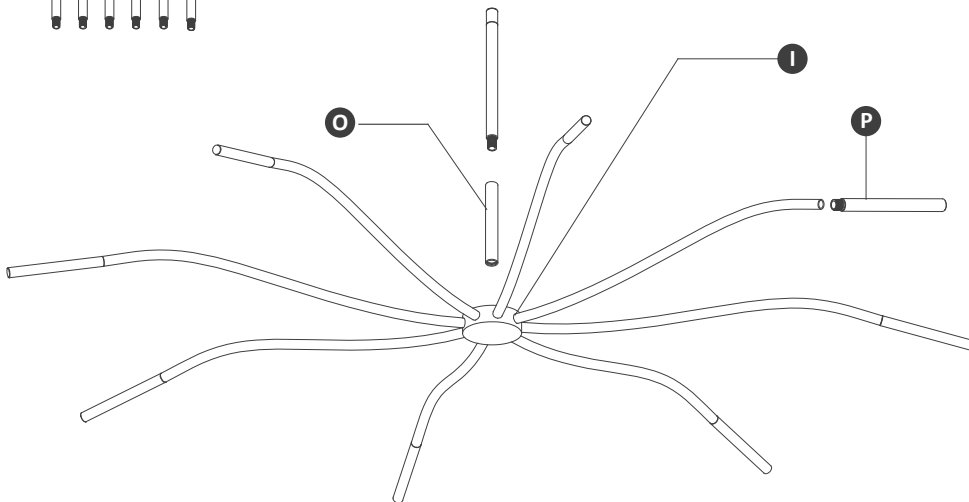

INSTRUCTIONS

Option 1: Driver In Canopy (see diagram 1) / Option 2: Driver In Junction Box

I. Preparing the Fixture

1. Unbox and carefully inspect all items included in the fixture's packaging to ensure they are present and in good condition, handling any fragile components with care.
2. If necessary, remove the collar nut to separate the mounting plate with screw collar from the canopy.
3. Feed the fixture wires and support cable through the tube, then securely thread the tube into the fixture body.
4. Determine the desired fixture height and select the appropriate combination of stems optional connectors.
5. Feed the fixture wires and support cable through the stems, then securely thread the stems together to assemble.
6. Continue feeding the fixture wires through the collar nut, canopy, and driver housing into the swivel ball assembly.
NOTE: Option 2 does not require the driver housing.
7. Holding the fixture upright, slide the collar nut, canopy, and driver housing down and rest them on top of the fixture, then screw the assembled stem onto the top of the fixture and attach the swivel ball to the top of the stem assembly.
8. Trim any excess fixture wire, leaving enough length to reach the junction box. Separate the wires and strip 5/8" of insulation from each conductor.

II. Wiring & Installing the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Install the mounting plate:

Option 1: Driver in canopy

1. Attach the tall mounting plate to the junction box using the provided mounting screws.
2. Slide the swivel ball onto the screw collar portion of the short mounting plate.
3. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a. Hot driver wire (black) and hot power line wire (hot to hot)
 - b. Neutral driver wire (white) and neutral power (neutral to neutral)

Option 2: Driver in junction box

1. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a. Hot driver wire (black) and hot power line wire (hot to hot)
 - b. Neutral driver wire (white) and neutral power (neutral to neutral)
2. Carefully insert the driver into the junction box, ensuring the driver output wires are accessible.
3. Attach the short mounting plate to the junction box using the provided mounting screws.
4. Slide the swivel ball onto the screw collar portion of the short mounting plate.
3. Feed the support cable through the hole in the mounting plate. Attach the cable lock to one end of the cable, then insert the free end back through the lock. Tighten both cable lock screws with a screwdriver to secure the support cable (see diagram 2).
4. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to a suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
5. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a. Negative (- / blue) fixture wire to the negative (-) output driver wire
 - b. Positive (+ / red) fixture wire to the positive (+) output driver wire
6. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires if not in use.
7. Attach the driver housing and canopy to the tall/short mounting plate and secure it in place with the collar nut.
NOTE: Option 2 does not require the driver housing.
8. Thread the shades to the fixtures.
9. Power the fixture on to finish installation and test its functioning.