






CITYSCAPE MEDIUM, GRANDE & X-GRANDE FLUSH MOUNTS

SLFM56727; SLFM56527; SLFM56627

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate
- E. Self-Drilling Anchors
- F. Anchor Screws
- G. Washers
- H. Fixture Screws
- I. Allen Wrenches
- J. Cable Catch
- K. Safety Cable
- L. Fixture Base/Backplate
- M. Fixture Arms
- N. Light Guides

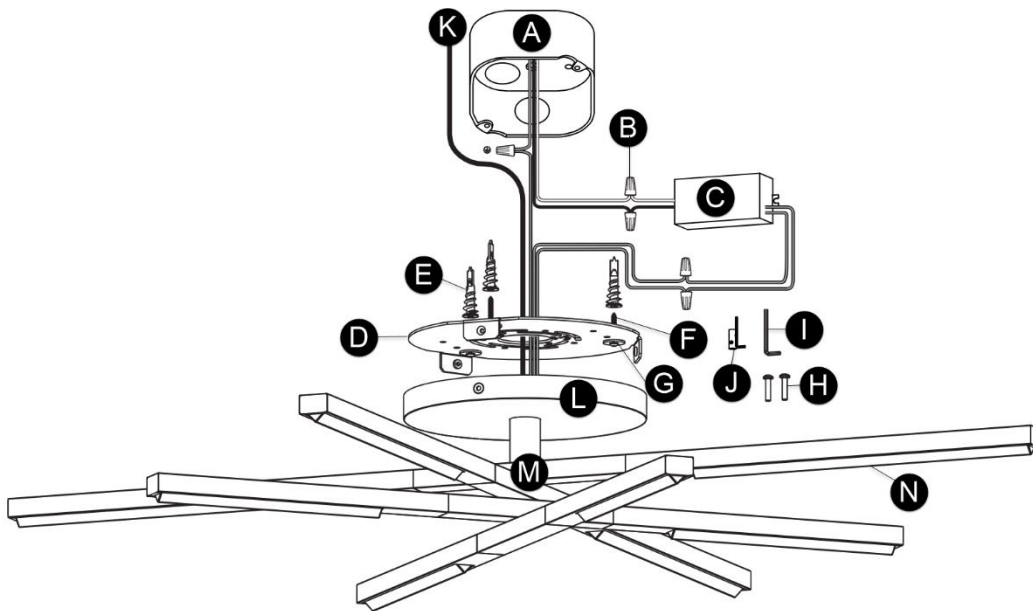

INSTRUCTIONS

I. Preparing for Installation

1. Separate the mounting plate from the canopy by removing the fixture screws.
2. Use the mounting plate to trace and mark the locations for the anchors. Drill a hole at the marked locations to fit the anchors into before drilling them in.
3. Match the labels on the light guides to the labels on the endpoint of each fixture arm and install them accordingly (e.g. "V1" light guide to "V1" fixture arm endpoint).

II. Wiring & Installing the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Connect the LED driver input wires to the local power line wires (120V). Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral driver wire (white) to neutral power line wire
 - b) Hot driver wire (black) to hot power line wire
3. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not in use.
4. Place the driver in the junction box, ensuring the output driver wires are accessible.
5. Slide the washers through the anchor screws and drill them into the anchors to secure the mounting plate to the junction box and ceiling.
6. Loop and secure the safety cable over a stable structure that agrees with local building codes.
7. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
8. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative (-) fixture wire to negative (-) output driver wire
 - b) Positive (+) fixture wire to positive (+) output driver wire
9. Carefully tuck all the wires into the canopy and junction box.
10. Place the canopy onto the mounting plate and secure it in place by screwing the collar nut onto it.